



(11) Publication number : **0 494 831 A2**

(12) **EUROPEAN PATENT APPLICATION**

(21) Application number : **92400071.4**

(51) Int. Cl.⁵ : **H04Q 11/00**

(22) Date of filing : **10.01.92**

(30) Priority : **10.01.91 JP 12373/91**
08.02.91 JP 37850/91

(43) Date of publication of application :
15.07.92 Bulletin 92/29

(84) Designated Contracting States :
DE FR GB SE

(71) Applicant : **FUJITSU LIMITED**
1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi Kanagawa 211 (JP)

(72) Inventor : **Tanaka, Kazuhiro, c/o Fujitsu Limited**
1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)
 Inventor : **Wakao, Kiyohide, c/o Fujitsu Limited**
1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)


Inventor : **Nobuhara, Hiroyuki, c/o Fujitsu Limited**
1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)
 Inventor : **Fujimoto, Nobuhiro, c/o Fujitsu Limited**
1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)
 Inventor : **Rokugawa, Hiroyuki, c/o Fujitsu Limited**
1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)
 Inventor : **Kuroyanagi, Satoshi, c/o Fujitsu Limited**
1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)

(74) Representative : **Joly, Jean-Jacques et al**
CABINET BEAU DE LOMENIE 55, rue
d'Amsterdam
F-75008 Paris (FR)

(54) **Optical processing device with wavelength stabilization and optical switch using such a device.**

(57) An optical processing device for converting a wavelength of an optical signal comprises an optical processing unit (11) supplied with an input optical beam carrying thereon one or more optical signals with respective wavelengths that are different from each other, the optical processing unit being further supplied with a control optical beam having a stabilized reference wavelength (λ_1) and selecting the optical signal that has a first wavelength and outputting the same with a second wavelength that is specified by the reference wavelength; and a control unit (12) for controlling the optical processing unit by specifying the first wavelength of the optical beam to be selected.

FIG. 3

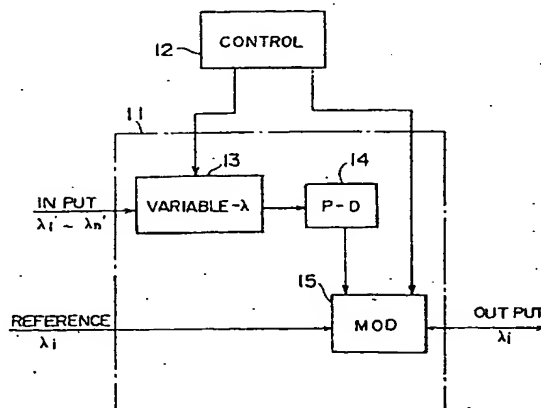

BACKGROUND OF THE INVENTION

The present invention generally relates to optical processing systems and more particularly to a wavelength-synchronized optical processing device that produces an optical signal with a wavelength that is synchronized to a stabilized wavelength of a reference optical beam and various optical information processing systems that use such an optical processing device.

With the extensive deployment of optical telecommunication network, studies are made on the optical transmission and reception in the optical exchange systems and optical subscriber systems. Among others, there is a proposal to transmit a plurality of optical signals having different wavelengths on a common optical fiber or optical waveguide in the wavelength multiplex mode. In such a wavelength multiplex transmission of optical signals, it is necessary to superpose the optical signals with sufficient wavelength interval such that a reception side can demultiplex the received optical signal into individual optical signal components with reliability. In such wavelength multiplex systems, it will be easily understood that the change or fluctuation of the oscillation wavelength occurring in the optical signals cause a disastrous effect in the operation of the reception-side systems.

FIG.1 shows the block diagram of a conventional optical processing system that uses a wavelength converter 1a.

Referring to FIG.1, the wavelength converter 1a is supplied with an input optical signal having a wavelength of λ_0 and produces an output optical signal with a wavelength of λ_1 . There, the wavelength converter converts the wavelength of the input optical signal to a second wavelength, and the optical signal having the wavelength λ_1 is divided out from the converted optical signal in response to a reference optical beam given externally with the wavelength λ_1 .

More specifically, the output optical signal of the wavelength converter 1a is supplied to an optical divider 2a that divides the incident optical beam into a first output beam corresponding to the output optical signal and a second output beam, and the second output beam is supplied to a wavelength comparator 3a. The wavelength comparator 3a is further supplied with the reference optical beam and produces an electric output indicative of the difference between the wavelength of the output optical signal of the converter 1a and the wavelength λ_1 of the reference optical beam.

The output electric signal of the comparator 3a is supplied to a controller 4a that in turn produces a control signal for controlling the operation of the wavelength converter 1a. According to this system, one can convert the wavelength λ_0 of the incident optical signal to the wavelength λ_1 by controlling the con-

verter 1a such that the output of the wavelength comparator 3a becomes zero. The wavelength converter 1a may be formed by using a DFB laser diode that can change the oscillation wavelength by controlling the bias current or temperature.

FIG.2 shows another conventional wavelength conversion system wherein an input optical signal having a wavelength λ_0 is supplied to a photoelectric converter 1b that produces an electric output in response to the incident optical signal. The output electric signal is supplied to a clock extraction circuit 2b wherein a clock signal is extracted from the information that is modulated on the input optical signal. The clock extraction circuit further discriminates the logic level of the binary information signal modulated on the input optical beam with a timing given by the clocks, and drives an optical modulator 3b. The optical modulator 3b is thereby supplied with a reference optical beam with the wavelength λ_1 and modulates the same in accordance with the electric output of the clock extraction circuit 2b. As a result, an optical output signal is obtained with the wavelength λ_1 .

In any of these conventional optical processing systems, there has been a problem in that the normal operation of the system is not achieved when there is a fluctuation in the wavelength of the input optical beam. It should be noted that, in the telecommunication systems, there is no guarantee that the transmission side uses the stabilized optical source with respect to the oscillation wavelength. Further, such a fluctuation of the wavelength of the optical signal may be caused as a result of the dispersion of optical pulses that occur in the optical fibers. Thus, the optical transmission system is not only required to eliminate the fluctuation of the wavelength of the optical source at the transmission side but is also required to have an ability to adapt to the fluctuation of wavelength and to eliminate the same at the reception side or at any intermediate locations between the transmission side and the reception side.

SUMMARY OF THE INVENTION

Accordingly, it is a general object of the present invention to provide a novel and useful wavelength-synchronized optical processing device, wherein the foregoing problems are eliminated.

Another and more specific object of the present invention is to provide a wavelength-synchronized optical processing device for use in an optical transmission system wherein the optical processing device is capable of eliminating the fluctuation of wavelength from an optical beam that is transmitted through the optical transmission system.

Another object of the present invention is to provide a wavelength-synchronized optical processing device comprising an optical processing unit supplied with an input optical beam carrying thereon one or

more optical signals having respective, mutually different wavelengths, for producing an output optical signal with a wavelength specified by the wavelength of a reference optical beam that is supplied to the optical processing unit externally, and a controller for controlling the operation of the optical processing unit. According to the present invention, one can select any optical signal component of the desired wavelength from the optical signals modulated on the input optical beam with the wavelength-multiplexed mode. Thereby, the wavelength of the input optical signal is synchronized to the stabilized wavelength of the reference optical beam and one can obtain the output optical signals with the accurate wavelength even when there is a substantial fluctuation in the wavelength of the incident optical signals.

In a preferred embodiment, the optical processing unit comprises a variable wavelength filter supplied with the input optical signal and controlled by the controller for selectively passing the optical signal having the wavelength specified by the wavelength of the reference optical beam, a photoelectric converter supplied with an optical output of the variable wavelength filter for converting the same to an electric signal, and an optical modulator supplied with the output electric signal of the photoelectric converter for modulating an optical beam having the wavelength of the reference optical beam in response to the electric signal. According to the present invention, one can extract a desired optical beam having a wavelength that is synchronized to the reference wavelength from the wavelength-multiplexed input optical beam. The optical processing unit may further include a wavelength converter for converting the wavelength of the output optical beam to a desired wavelength. Thereby, one can reestablish the wavelength multiplex of the optical signals with the interval of the wavelength set stably.

Another object of the present invention is to provide an optical switching system comprising an electro-optic converter supplied with input electric signals of different channels for producing optical signals in correspondence to the input electric signals with respective, mutually different wavelengths, an optical distribution unit supplied with the output optical signals from the electro-optic converter for merging and distributing the optical signals into a plurality of physically separated optical channels, and a wavelength-synchronized optical processing device provided on each of the optical channels for producing a stabilized optical output that has a wavelength stabilized with respect to an wavelength of a reference optical beam, and a reference beam generator for producing the reference optical beam with a stabilized wavelength. According to the present invention, one can direct the information signal to any optical channels by merging the optical signals at the optical distribution unit and recovering the original information therefrom at the

wavelength-synchronized optical processing device by selecting the wavelength of the reference optical beam produced by the reference beam generator. Thereby, the exchange of signals between a huge number of channels is achieved with a simple construction of the switching system.

In a preferred embodiment of the present invention, the optical channels are grouped into a plurality of channel groups each including a plurality of channels, and the reference beam generator supplies the reference optical beam to the plurality of channel groups commonly such that the wavelength of the reference beam is changed in each channel in one channel group.

Another object of the present invention is to provide an optical switching system comprising a plurality of input-side optical channels for guiding wavelength-multiplexed optical signals therethrough, a plurality of output-side channels for guiding output optical signals therethrough, each of said input-side optical channels and each of said output-side optical channels being crossed with each other at a node, wherein there is provided a wavelength-synchronized optical processing device in correspondence to each node, said optical processing device comprising: an optical processing unit supplied with said wavelength-multiplexed input optical signal and a reference optical beam having a reference wavelength for transferring selectively an optical signal that has a wavelength specified by the reference wavelength from the optical input channel to the optical output channel; and a reference beam generator for producing the reference optical beam with said reference wavelength. According to the present invention, the transfer of optical signals from the plurality of input-side optical channels to a desired output-side optical channel is achieved while simultaneously stabilizing the wavelength of the output optical beam on the output-side optical channel. Further, a number of optical output signals having different wavelengths are multiplexed on the output-side optical channel at the plurality of nodes and one obtains a wavelength-multiplexed optical signal with stabilized wavelengths.

In a preferred embodiment, one may provide intermediate optical channels to link the input-side optical channels and the output-side optical channels, with the optical processing unit and the reference beam generator provided at each node between the input-side optical channels and the intermediate optical channels and further at each node between the intermediate optical channels and the output-side optical channels.

Another object of the present invention is to provide a variable-wavelength filter device that is supplied with a control signal having a controlled wavelength for selectively transmitting an incident optical beam that has a wavelength specified by the controlled wavelength.

Other objects and further features of the present invention will become apparent from the following detailed description when read in conjunction with the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG.1 is a block diagram showing the construction of a conventional wavelength conversion circuit used in an optical transmission system;

FIG.2 is a block diagram showing another conventional wavelength conversion circuit;

FIG.3 is a block diagram showing the construction of the wavelength-synchronized optical processing device according to a first embodiment of the present invention;

FIG.4 is a block diagram showing the construction of a variable filter used in the optical processing device of FIG.3;

FIG.5 is a block diagram showing another example of the variable filter of FIG.4;

FIG.6 is a block diagram showing still another construction of the variable filter of FIG.4;

FIG.7 is a diagram showing the structure of a semiconductor optical device used in the variable filter of FIG.6;

FIG.8 is a diagram showing the operational characteristics of the device of FIG.7;

FIG.9 is a block diagram showing the construction of the wavelength-synchronized optical processing device according to a second embodiment of the present invention;

FIG.10 is a block diagram showing the construction of the wavelength-synchronized optical processing device according to a third embodiment of the present invention;

FIG.11 is a block diagram showing the construction of the wavelength-synchronized optical processing device according to a fourth embodiment of the present invention;

FIG.12 is a block diagram showing the construction of the wavelength-synchronized optical processing device according to a fifth embodiment of the present invention;

FIG.13 is a block diagram showing the construction of the optical transmitter according to a sixth embodiment of the present invention that uses the wavelength-synchronized optical processing device;

FIG.14 is a block diagram showing the construction of the optical transmitter according to a seventh embodiment of the present invention that uses the wavelength-synchronized optical processing device;

FIG.15 is a block diagram showing the construction of an optical matrix switch according to an eighth embodiment of the present invention that uses the wavelength-synchronized optical pro-

cessing device;

FIG.16 is a block diagram showing the essential part of the optical matrix switch of FIG.15;

FIG.17 is a block diagram showing the construction of an optical matrix switch according to a ninth embodiment of the present invention;

FIG.18 is a block diagram showing the construction of the optical switching system according to a tenth embodiment of the present invention wherein the wavelength-synchronized optical processing device is used;

FIG.19 is a block diagram showing the construction of the optical switching system according to an eleventh embodiment of the present invention;

FIG.20 is a block diagram showing the construction of the optical transmission system according to a twelfth embodiment of the present invention; and

FIG.21 is a block diagram showing the construction of the optical transmission system according to a thirteenth embodiment of the present invention wherein the wavelength-synchronized optical processing device is used.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG.3 shows the general construction of the wavelength-synchronized optical processing device according to a first embodiment of the present invention. The optical processing device of FIG.3 is an optical demultiplexer that selectively recovers an optical signal component from a wavelength-multiplex optical signal modulated on an input optical beam, in response to a reference optical beam that specifies the wavelength of the optical signal to be recovered.

Referring to FIG.3, the optical processing device includes an optical processing unit 11 and a control unit 12, wherein the optical processing unit 11 is generally formed from a variable-wavelength band pass filter 13, a photodetector 14 and an optical modulation unit 15. The band pass filter 13 of the optical processing unit 11 is supplied with an incident optical beam and controlled by the control unit 12 such that only the optical signal that has a particular wavelength specified by the control unit 12 is passed through the filter 13.

The output optical beam of the filter 13 is supplied to the photodetector 14 wherein the photodetector 14 converts the optical beam to an electric signal. The output electric signal of the photodetector 14 is supplied to the optical modulation unit 15 and the optical modulation unit 15 modulates the reference optical beam in response to the electric output of the photodetector 14. As will be described later in detail, the filter 13 may be formed of a DFB laser amplifier and changes the wavelength of the optical beam passing therethrough in response to a bias current that is con-

trolled below the threshold of laser oscillation. The optical modulation unit 15 may be a Franz-Keldysh effect device or a laser diode of which gain can be changed in response to the output of the photodetector 14.

In operation, an input optical beam that carries thereon optical signals having respective wavelengths $\lambda_1' - \lambda_n'$ in the wavelength-multiplex mode is supplied to the filter 13 that in turn is controlled by the control unit 12 to pass the optical signal having the wavelength λ_i' selectively. Meanwhile, the wavelength of the reference beam is well stabilized by using a stabilized optical source such as a laser diode of which operational temperature and bias current are compensated for with respect to any variation. Thereby, one obtains the output optical signal from the optical modulation unit 15 with the wavelength λ_i in correspondence to foregoing original optical signal of the wavelength λ_i' . The circuit 11 can be formed as an integrated circuit including the control unit 12.

FIG.4 shows the construction of the filter 13 used in the system of FIG.3.

Referring to FIG.4, the filter 13 includes a number of filter elements $13_1 - 13_4$ respectively passing the optical beams of the wavelengths $\lambda_a - \lambda_d$, as well as a number of filter elements $13_5 - 13_8$ respectively passing the optical beams of the wavelengths $\lambda_1' - \lambda_4'$, wherein the wavelength-multiplexed input optical beam is supplied to each of the filter elements $13_5 - 13_8$ parallel with each other. Further, the reference optical beam is supplied parallel to each of the filter elements $13_1 - 13_4$.

The output optical beams of the filter elements $13_5 - 13_8$ are supplied to corresponding variable transmittance controllers $13_9 - 13_{12}$ each having a transmittance that is controlled in response to the output of the corresponding filter element. Thus, when the reference optical beam is given with the wavelength of λ_a , the transmittance of the controller 13_9 is selectively increased and the optical signal having the wavelength λ_1' and passed through the filter element 13_5 is selectively outputted as an output optical beam of the filter 13.

In the present embodiment, one may employ any of the multi-layered dielectric films, optical waveguides, or the spatial filters that use the diffraction grating, for the filter element $13_5 - 13_8$. Preferably, the wavelengths $\lambda_a, \lambda_b, \lambda_c$ and λ_d may be set coincident to the wavelengths $\lambda_1', \lambda_2', \lambda_3'$ and λ_4' such that $\lambda_a = \lambda_1', \lambda_b = \lambda_2', \lambda_c = \lambda_3'$ and $\lambda_d = \lambda_4'$. This, of course, is not the essential requirement for the operation of the device.

FIG.5 shows an example of the variable transmittance controllers $13_9 - 13_{12}$, wherein the input optical signal from the filter $13_5 - 13_8$ is supplied to a laser amplifier 13_{23} for amplification by the stimulated emission caused therein in response to the passage of the wavefront of the input optical beam. The operation of

the laser amplifier 13_{23} is controlled by an electronic control circuit 13_{22} that in turn is controlled in response to an electric signal produced by a photodetector 13_{21} to which the reference optical beam is supplied.

More specifically, the electronic circuit 13_{22} produces a bias signal to the laser amplifier 13_{23} when there is an incident reference optical beam to the photodetector 13_{21} . In response to the bias signal, the laser amplifier 13_{22} amplifies the incident input optical signal, while when there is no bias signal, the laser amplifier 13_{22} absorbs the input optical signal. For the variable transmittance controllers, one may use, in addition to the foregoing laser amplifier, a Franz-Keldysh effect device or MQW optical modulator that uses the quantum confinement Stark effect.

FIG.6 shows another embodiment of the variable-wavelength filter 13 wherein there is provided an optical switch 13_{31} that has a first input port A for receiving the reference optical beam and a second input port B for receiving the input optical beam, wherein one of the optical beams at the input port A and the input port B is supplied selectively to a filter device 13_{32} of which wavelength is controlled by a controller 13_{34} . The optical beam that has passed through the filter device 13_{32} is supplied to a second optical switch 13_{33} that has a first output port C connected to an output waveguide (not shown) and a second output port D connected to the controller 13_{34} .

In operation, the first optical switch 13_{31} is set at first such that the input port B is selected. Further, the second optical switch 13_{33} is set such that the output port D is selected. In this state, the reference optical beam supplied to the input port B is transferred to the controller 13_{34} after passing through the filter device 13_{32} and the switch 13_{33} . Thereby, the controller 13_{34} sets the state of the filter device 13_{32} such that the transmittance of the optical beam becomes maximum. After such a training of the filter device 13_{32} is completed, the state of the optical switches 13_{31} and 13_{33} switched such that the input optical beam at the port A is outputted at the port C after passing through the filter device 13_{32} . Thereby, only the optical signal that has the wavelength coincident to the wavelength of the filter device 13_{32} alone appears at the output port C. In other words, the system 13 acts as the variable-wavelength filter that passes the optical signal having a wavelength coincident to the wavelength of the reference optical beam selectively.

FIG.7 shows the construction of the filter device 13_{32} .

Referring to FIG.7, the filter device 13_{32} is formed of a DFB laser diode that has an active layer 13_{41} and a diffraction grating 13_{42} . In operation, the device is biased below the threshold of laser oscillation. Thereby, the incident optical beam causes a stimulated emission in the active layer 13_{41} upon passage therethrough.

FIG.8 shows the band-pass characteristics of the

laser amplifier of FIG.7 for different bias voltages. As can be seen in FIG.8, the peak of the transmittance shifts in response to the bias voltage. By using this effect, one can set the pass-band or pass-wavelength in the filter device by means of the controller 13₄₃.

According to the construction of FIG.6, one can maintain the stable operational characteristics for the filter 13 as a whole even when there is a change in the operational characteristics of the laser amplifier itself. Obviously, this is due to the feedback control of the laser amplifier 13₃₂ as described above. For the optical switches 13₃₁ and 13₃₃, one may use the directional coupler and saturable optical absorption switch that changes the transmittance in response to the injection of carriers.

FIG.9 shows a wavelength-synchronized optical processing device according to a second embodiment of the present invention.

Referring to FIG.9, the device includes an optical processing unit 11a and a control unit 11b, wherein the optical processing unit 11a uses the photodetector 14 for detecting the input optical beam that has the wavelength of λ_1' similarly to the optical processing unit 11 of the first embodiment. This input optical beam may have the fluctuation in the wavelength λ_1' .

The output electric signal of the photodetector 14 is supplied to the optical modulator 15 that in turn is supplied with the reference optical beam of the wavelength λ_1 . Thereby, the optical modulator 15 modulates the reference optical beam with the output electric signal of the photodetector 14, and an output optical beam carrying the optical signal of the original wavelength λ_1' is obtained with a stabilized wavelength of λ_1 . Further, a control unit 12a is used for controlling the operation of the optical modulator 15.

FIG.10 shows a wavelength-synchronized optical processing device according to a third embodiment of the present invention.

Referring to FIG.10, the optical processing device is formed of an optical processing unit 11b and a control unit 12b, wherein there is provided a laser diode 16 that is controlled by a controller 12b. There, the laser diode is injected with the reference optical beam of the stabilized wavelength λ_1 and further with the input optical beam of the wavelength λ_1' for producing an output optical beam carrying thereon the information modulated on the input optical beam with the wavelength of λ_1 . Thereby, the laser diode acts as the wavelength converter. Again, the optical signal of the wavelength λ_1' and containing fluctuation is converted to the optical signal of the wavelength λ_1 that is free from fluctuation.

FIG.11 shows a fourth embodiment of the optical processing device according to the present invention.

Referring to FIG.11, the optical processing device of the present embodiment has a construction similar to that of FIG.3 except that there is provided a wavelength converter 17 after the optical processing

unit 11 for converting the wavelength of the output optical beam from the wavelength λ_1 to another wavelength λ_2 . By using the optical processing unit 11a or 11b described with reference to FIGS.9 and 10 for the wavelength converter 17, one can obtain the output optical beam with the stabilized wavelength λ_2 . FIG.12 shows the optical processing device according to a fifth embodiment of the present invention.

Referring to the drawing, the optical processing device of the present embodiment has a structure similar to that of FIG.10 except that there is provided a variable-wavelength filter 18 provided for filtering the input optical beam. As shown in FIG.12, the variable-wavelength filter 18 is controlled by the controller 12b and selectively passes one of the optical signals multiplexed on the input optical beam with the wavelengths $\lambda_1' - \lambda_n'$. In this case, too, any of the desired optical signals that are multiplexed on the input optical beam with the wavelength-multiplex mode is converted to the desired, stabilized wavelength λ_1 .

FIG.13 shows an optical path selector according to a sixth embodiment of the present invention, wherein a number of optical processing devices 21₁ - 21_n are used.

Referring to the drawing, the optical path selector of the present embodiment uses a number of electro-optic converters 23₁ - 23_n, wherein each electro-optic converter may be formed from a laser diode that produces an optical signal with a wavelength that is pertinent to the laser diode. Thus, the electro-optic converter 23₁ produces the optical signal with a wavelength λ_1 , the electro-optic converter 23₂ produces the optical signal with a wavelength λ_2 , ..., and the electro-optic converter 23_n produces the optical signal with a wavelength λ_n . Further, the output optical signals of these electro-optic converters are supplied to an optical synthesis and distribution unit 24 that synthesizes a wavelength-multiplex optical signal from these optical signals.

The output optical signals thus produced by the unit 24 are supplied to respective optical processing devices 21₁ - 21_n, wherein each optical processing device 21₁ - 21_n has a construction similar to any of the wavelength-synchronized optical processing devices described previously. Further, there is provided a reference optical beam generator 22 that includes a number of stabilized laser diodes each stabilized in terms of the temperature and bias current and produces the reference optical beam with stabilized wavelengths.

The reference optical beam thus produced is supplied to the optical processing devices 21₁ - 21_n as the reference optical beam as described previously, and each optical processing device produces an output optical beam with the stabilized wavelength that is specified by the wavelength of the reference optical beam. Thus, when the reference optical beam having the wavelength λ_1 is supplied to the optical processing

device 21₁, the original optical signal having the wavelength λ_1 is selectively outputted to the optical transmission line connected to the optical processing device 21₁ with the stabilized wavelength of λ_1 . Alternatively, the optical processing device 21₁ may be supplied with the optical output signal of the wavelength λ_2 from the electro-optic converter 23₂ and output the same on the transmission line connected to the device 21₁ with the wavelength of λ_1 . The selection of the wavelength of the input optical signal at the optical processing device 21₁ - 21_n may be achieved by the control unit provided in each of the optical processing device.

By multiplexing the output optical signals of the optical processing devices 21₁ - 21_n again, one can obtain a wavelength-multiplexed optical signal wherein the wavelength of each signal component is highly stabilized even when there is a fluctuation in the oscillation wavelength of the laser diode used in the electro-optic converters 23₁ - 23_n. Thus, the system of the present embodiment is suited for use in optical path selectors or optical transmitters that send the wavelength-multiplex optical signals with stabilized wavelengths.

FIG.14 shows the block diagram of an optical transmitter according to a seventh embodiment of the present invention.

Referring to FIG.14, there are provided a number of electro-optic converters wherein the electro-optic converters are grouped into a number of groups each including the electro-optic converters 23₁ - 23_n. In each group, the output optical beams produced by these electro-optic converters are supplied to corresponding optical processing devices 21₁ - 21_n directly similar to the embodiment of FIG.14. Further, the reference optical beam generator 22 produces the reference optical beams with the wavelengths of $\lambda_1, \lambda_2, \dots, \lambda_n$ similar to the embodiment of FIG.13. Thereby, the wavelengths $\lambda_1 - \lambda_n$ are changed from each other in each group while the reference optical beams are supplied to the optical processing devices of other groups in parallel.

In operation, the optical processing device can produce the optical signals with any desired wavelengths by supplying thereto suitable reference optical beams from the generator 22. For example, one can obtain the output optical signal from the device 21₁ by supplying the reference optical beam thereto with the wavelength of λ_n . Thus, the present embodiment is useful for the optical transmitters and the optical repeaters. Further, the system of FIG.14 can be configured to form a number of optical channels each carrying the wavelength-multiplexed optical signals of the wavelengths of $\lambda_1 - \lambda_n$.

FIG.15 shows an optical matrix switch according to an eighth embodiment of the present invention, wherein there are provided a number of optical transmission lines 33 at the input side and a number of opti-

cal transmission lines 34 at the output side. On each transmission line 33 of the input side, wavelength-multiplexed optical signals are supplied with wavelengths $\lambda_1' - \lambda_n'$, while on each transmission line 34 of the output side, wavelength-multiplexed optical signals are carried with wavelengths of $\lambda_1 - \lambda_n$.

At each intersection of the transmission line 33 and the transmission line 34, there is provided a wavelength-synchronized optical processing device 31 that has a construction of any of the foregoing embodiments of FIGS.3 - 12, and each optical processing system 31 is supplied with the reference optical beam that is produced by a reference optical beam generator 32 with the stabilized wavelengths of $\lambda_1 - \lambda_n$. Thereby, the optical processing device 31 causes a transfer of the input optical signal of the selected wavelength from the transmission line 33 of the input side to the optical transmission line 34 of the output side, wherein the optical signal thus transferred has a stabilized wavelength that is specified by the wavelength of the reference optical beam.

It should be noted that each optical transmission line 34 carries thereon a number of wavelength multiplexed optical signals produced by a group of the optical processing devices 31 that are connected commonly to a single optical transmission line 33. Particularly, the group of the optical processing devices 31 that are provided commonly on one optical transmission line 33 are supplied with a single reference optical beam commonly, and the wavelength of the reference optical beam is changed in each optical transmission line 33. Thereby, optical signals of different wavelengths are outputted on each optical transmission line 34 of the output side. Further, by changing the combination of the wavelengths of the reference optical beams on the lines 34, one can output any optical signal on any optical transmission line 33 on any desired optical transmission line 34 with any desired wavelength.

FIG.16 shows the details of the optical matrix switch of FIG.15.

Referring to FIG.16, there is provided an optical divider 35 on the optical transmission line in correspondence to each of the optical processing devices 31 for tapping the wavelength-multiplexed optical signals on the transmission line 33, and the optical signals thus tapped are supplied to the optical processing device 31. The optical processing device 31 selects one of the optical signals on the line 33 and outputs the selected optical signal with the wavelength of the reference optical beam. The output optical beam of the optical processing device 31 in turn is supplied to an optical coupler 36 that is provided on the optical transmission line 34 in correspondence to each of the optical processing device 31. The optical coupler 36 establishes an optical coupling between an optical fiber or waveguide that carries the optical output of the system 31 and the optical fiber or

waveguide forming the optical transmission line 34, and the optical beam outputted from the optical processing device 31 is merged or wavelength-multiplexed upon the optical signals on the line 34. It should be noted that such an optical matrix switch can be constructed in the form of optical integrated circuit by forming the optical divider 35 and the optical coupler 36 together with the optical processing device 31 and the reference optical beam generator 32 on a common substrate.

FIG. 17 shows an optical matrix switch according to a ninth embodiment of the present invention.

Referring to FIG. 17, two optical matrix switches 38 and 39 each having the construction of FIG. 16 are connected in series, wherein the matrix switches 38 and the matrix switches 39 are connected by intermediate optical transmission lines $37_1 - 37_n$. These optical transmission lines act as the optical transmission lines at the output side for the optical matrix switch 38 while act simultaneously as the input side optical transmission lines for the optical matrix switch 39. Further, the reference optical beam generator 32 is used commonly for both the optical matrix switch 38 and the optical matrix switch 39, wherein the reference optical beam generator 32 supplies the reference optical beams to the optical matrix 38 and the optical matrix 39 independently.

In the typical example of operation, the reference optical beam having the wavelength of λ_1 is supplied to a group of the optical processing devices 31 that are located at the intersections formed between the line 33_1 and the lines $37_1 - 37_n$, while the reference optical beam having the wavelength of λ_2 is supplied to another group of the optical processing devices 31 that are located at the intersections formed between the line 33_2 and the lines $37_1 - 37_n$. Similarly, the wavelength of the reference optical beam supplied to a group of the optical processing devices 31 that are provided on a common optical transmission line of the input side is changed with respect to the wavelength of the reference optical beam that is supplied to the to another group of the optical processing devices 31 that are provided commonly on another input side optical transmission line. Thereby, the overlapping of the wavelength of the optical signals that are outputted commonly on an output side optical transmission line such as the line 37_1 is positively eliminated.

The optical signals thus outputted on the lines $37_1 - 37_n$ are then switched by the second optical matrix switch 39, wherein the optical switching similar to the one described with reference to the optical matrix switch 38 is achieved. Thereby, output optical signals having respective wavelengths determined by the wavelength of the reference optical beams supplied to the optical matrix switch 39 are obtained at the output optical transmission lines $34_1 - 34_n$. The wavelength of these output optical signals is of course stabilized by using the stabilized optical source for the reference

optical beam generator 32.

FIG. 18 shows a tenth embodiment of the present invention, wherein the present embodiment forms a wavelength converter for converting the wavelength of the optical signals modulated on the input optical beam with the wavelength-multiplex mode and outputting the optical signals thus converted in the wavelength multiplex mode.

Referring to FIG. 18, there are provided a number of optical processing devices $41_1 - 41_n$ each having the construction of any of the wavelength-synchronized optical processing devices described previously, wherein each of the optical processing devices $41_1 - 41_n$ is supplied with the wavelength-multiplex optical signals from the optical distribution part 44 that in turn is supplied with an input optical beam carrying the wavelength-multiplex signals and distributing the same to the optical processing devices $41_1 - 41_n$. Further, the optical processing devices $41_1 - 41_n$ are controlled by a control unit 43 that selects an optical signal from the wavelength-multiplexed optical signals. When the optical processing unit 11 is used for the optical processing devices $41_1 - 41_n$, the control unit 43 controls a variable-wavelength filter similar to the filter 13 of FIG. 3. Thereby, the control unit 43 acts as the control unit 12.

Further, there is provided a reference optical beam generator 42 that produces the reference optical beam with the wavelengths $\lambda_1, \lambda_2, \dots, \lambda_n$ and supply the same to respective optical processing devices. In response to the reference optical beams thus supplied, the optical processing devices $41_1 - 41_n$ produce output optical beams in coincidence with respective wavelengths of the reference optical beams. The output optical beams thus produced are added in an optical synthesis unit 45 that produces the an output optical beam on which the optical signals are modulated in the wavelength-multiplex mode.

In the system of the present embodiment, it should be noted that one can convert the optical signal of the wavelength λ_1 to the optical signal having the stabilized wavelength λ_j . For example, one can convert the optical signal of the wavelength λ_1 to the optical signal of the wavelength λ_n and the optical signal of the wavelength λ_2 to the optical signal of the wavelength λ_1 .

FIG. 19 shows an eleventh embodiment of the present invention.

Referring to FIG. 19, the optical processing system of the present embodiment includes a number of wavelength-synchronized optical processing devices $51_1 - 51_m$ described previously with reference to FIGS. 3 - 12 and a reference optical beam generator 52 for producing the reference optical beam.

In the present embodiment, there are a number of optical transmission lines $53_1 - 53_m$ at the input side, wherein each transmission line is connected to a cor-

responding optical distribution unit 55₁ - 55_m and supplies thereto a wavelength-multiplexed input optical beam. Similarly to previous cases, the input optical beam carries thereon the optical signals of the wavelengths λ_1 - λ_n .

Each optical distribution unit such as the unit 55₁ is connected to a number of optical processing devices such as 51₁₁ - 51_{1n} for supplying the wavelength-multiplexed optical signals to each of these devices. The optical processing devices are supplied with the reference optical beams from the reference optical beam generator 52 with selected wavelengths and produce the output optical signals with the wavelength specified by the wavelength of the reference beams.

More particularly, the reference optical beam of the wavelength λ_1 is supplied to the optical processing devices 51₁₁ - 51_{1n} commonly, the reference optical beam of the wavelength λ_2 is supplied to the optical processing devices 51₂₁ - 51_{2n} (not shown) commonly, . . . and the reference optical beam of the wavelength λ_n is supplied to the optical processing devices 51_{n1} - 51_{nn} commonly. Thereby, all the output optical signals produced from the optical processing devices 51₁₁ - 51_{1n} have the wavelength λ_1 , all the output optical signals produced from the optical processing devices 51₂₁ - 51_{2n} have the wavelength λ_2 , . . . , and all the output optical signals from the optical processing devices 51_{n1} - 51_{nn} have the wavelength of λ_n .

In the present embodiment, the optical output of each optical processing device is supplied to a corresponding optical synthesis unit such that each optical synthesis unit is supplied with optical signals of mutually different wavelengths from different optical processing devices. For example, the output optical signal of the optical processing device 51₁₁ is supplied to an optical synthesis unit 56₁, the optical output of the optical processing device 51₁₂ is supplied to an optical synthesis unit 56₂ (not shown) . . . and the optical output of the optical processing device 51_{1n} is supplied to an optical synthesis unit 56_m. It should be noted that all the optical output signals mentioned above have the wavelength of λ_1 .

When viewed from the side of the optical synthesis unit, the optical synthesis unit 56₁ is supplied with the output optical signals from the optical processing devices 51₁₁, 51₂₁, . . . 51_{n1} with the wavelengths of λ_1 , λ_2 , . . . λ_n and produces an output optical beam on which these optical signals are multiplexed in the wavelength-multiplex mode. Similarly, the optical synthesis unit 56_m is supplied with the output optical signals from the optical processing devices 51_{1n}, 51_{2n}, . . . 51_{nn} with respective wavelengths of λ_1 , λ_2 , . . . λ_n and produces an output optical beam on which the optical signals are multiplexed in the wavelength-multiplex mode. Thereby, the system of FIG.19 converts the wavelength of the optical signals from λ_1 - λ_n to λ_1 -

λ_n and simultaneously stabilizes the wavelength of the output optical signals. It should be noted that any combination of the optical signals supplied on the input side optical transmission lines 53₁ - 53_m can be obtained on each of the output side transmission lines 54₁ - 54_m in the form of wavelength-multiplexed optical signals.

FIG.20 is a block diagram showing the construction of an optical information transmission system wherein an optical matrix switch 61 having the construction of FIG.15 or FIG.17 is used.

Referring to FIG.20, there are provided a number of optical transmission terminals 62₁ - 62_m connected to the input side optical transmission lines of the optical matrix switch 61. Further, a number of optical reception terminals 63₁ - 63_m are connected to the output side optical transmission lines of the matrix switch 61.

Each optical transmission terminal such as the terminal 62₁ includes an optical transmitter 64 for producing a number of optical signals with respective wavelengths λ_1 - λ_n and an optical synthesizing unit 65 supplied with the optical signals for producing a wavelength-multiplexed optical beam from the optical signals. On the other hand, each optical reception terminal such as the terminal 63₁ includes an optical distribution unit 66 supplied with the wavelength-multiplexed optical signals from the optical matrix switch 61 and a variable-wavelength filter 67 for selecting an optical signal of a specific wavelength. Further, there is provided a photodetector 68 in connection with the filter 67 for detecting the optical signal that has passed through the filter 67.

By controlling the optical matrix switch 61 in accordance with control information such as the address information, the path and the wavelength of the optical signals are switched in the matrix switch 61. More specifically, one can switch a huge number of channels (number of wavelength multiplex signals X number of transmission lines) simultaneously by using the system of FIG.20.

FIG.21 shows a thirteenth embodiment of the present invention.

Referring to FIG.21, the system of the present embodiment is also an optical transmission system, wherein there are provided a number of transmission terminals 73₁ - 73_m each supplied with electric signals and producing optical signals in correspondence to the electric signals with respective wavelengths.

The output optical signals of the terminals 73₁ - 73_m are supplied to an optical path selector 71 that includes a number of optical synthesis and distribution units 75 as well as 76 provided in correspondence to the transmission terminals 73₁ - 73_m and the reception terminals 74₁ - 74_m. The optical path selector 71 has a construction similar to the system shown in FIG.19, and the output optical signals of each transmission terminal are mixed to form a wavelength-mul-

timeplexed optical signal similar to the embodiment of FIG. 19. Further these wavelength-multiplexed optical signals are selected by the optical processing devices similar to the devices of 51_{11} - 51_{mn} and are distributed further to a number of optical synthesis and distribution units 76 provided in correspondence to the optical reception terminals 74_1 - 74_m . In FIG. 21, the optical processing devices are not illustrated for the sake of clarity of the drawing. There, any combination of the optical signals produced by the optical transmission terminals 73_1 - 73_m is obtained at the output of each optical synthesis and distribution unit 76 in the form of the wavelength-multiplexed optical signals.

The optical output thus obtained is then selectively passes through a filter 77 and detected by a photodetector 78. In this case, too, one can switch a large number of connections of which number is given by the product of the number of wavelength-multiplex signals and the number of optical transmission lines or channels, simultaneously.

Claims

1. An optical processing device for converting a wavelength of an optical signal, characterized by:
 - optical processing means (11, 11a, 11b) supplied with an input optical beam carrying thereon one or more optical signals with respective wavelengths (λ_1 ' - λ_m ') that are different from each other, said optical processing means being further supplied with a control optical beam having a stabilized reference wavelength, said optical processing means selecting the optical signal that has a first wavelength and outputting the same with a second wavelength that is specified by the reference wavelength; and
 - control means (12) for controlling the optical processing means by specifying the first wavelength (λ_1) of the optical beam to be selected.
2. An optical processing device as claimed in claim 1 characterized in that said optical processing means comprises a filter device (13) having a variable transmission wavelength, said filter device being controlled by said control unit and selectively passing the optical signal of the first wavelength that is specified by the control unit, a photodetector (14) supplied with the optical signal that has passed through the filter device with the first wavelength for detecting the same, said photodetector producing an output electric signal in response to the optical signal, and an optical modulation unit (15) supplied with said control optical beam for modulating the same in response to the output electric signal of the photodetector.
3. An optical processing device as claimed in claim 1 characterized in that said second wavelength is set identical with the reference wavelength.
4. An optical processing device as claimed in claim 2 characterized in that said optical processing means (11) further comprises wavelength conversion means (17) for converting the wavelength of the optical beam produced by the optical modulation unit.
5. An optical path selector system for switching a path of an optical signal, characterized by:
 - a plurality of electro-optic conversion devices (23_1 - 23_n) respectively supplied with electric signals for converting the same to corresponding optical signals with respective wavelengths that are different from each other;
 - optical multiplexing means (24) supplied with the output optical signals of the electro-optic conversion devices for mixing the same to form a wavelength-multiplexed optical signal, said wavelength-multiplexed optical signal containing said optical signals with the respective wavelengths that are different from each other as component optical signals, said optical mixing means having a plurality of output ports and distributing the wavelength-multiplexed optical signal to said plurality of output ports;
 - a plurality of optical processing devices (21_1 - 21_n) connected to each of said plurality of output ports for receiving said wavelength-multiplexed optical signal, each of said plurality of optical processing devices being supplied with a reference optical beam having a reference wavelength and selecting an optical signal of a predetermined wavelength from said wavelength-multiplexed optical signal and outputting the selected optical signal with a wavelength determined by said reference wavelength; and
 - a reference optical beam generator (22) for producing said reference optical beam and supplying the same to said plurality of optical processing devices with respective wavelengths.
6. An optical path selector system for switching a path of an optical signal, characterized by:
 - a plurality of electro-optic conversion devices (23_1 - 21_n) respectively supplied with electric signals for converting the same to corresponding optical signals with respective wavelengths that are different from each other, said plurality of electro-optic conversion devices being divided into a plurality of groups each including a plurality of electro-optic conversion devices;
 - a plurality of optical processing devices (21_1 - 21_n) connected to each of said plurality of electro-optic conversion devices for receiving

said wavelength-multiplexed optical signal, said optical processing devices being grouped into a plurality of groups corresponding to the plurality of groups of the electro-optic conversion devices, each of said plurality of optical processing devices being supplied with a reference optical beam having a reference wavelength and selecting an optical signal of a predetermined wavelength from said wavelength-multiplexed optical signal and outputting the selected optical signal with a wavelength determined by said reference wavelength; and

a reference optical beam generator (22) for producing said reference optical beam and supplying the same to said plurality of optical processing devices with respective wavelengths, said reference optical beam generator supplying the reference optical beams to said plurality of optical processing devices with the reference wavelengths that are different from each other in each group of said optical processing devices.

7. An optical matrix switch for switching a wavelength-multiplexed optical beam carrying thereon a number of optical signals of different wavelengths, characterized by:

a plurality of first optical transmission lines (33) each supplied with an input wavelength-multiplexed optical signal and transmitting the same, said input wavelength-multiplexed optical signal containing therein a plurality of input optical signals with respective wavelengths (λ_1' - λ_n') that are different from each other;

a plurality of second optical transmission lines (34) each supplied with an output wavelength-multiplexed optical signal and transmitting the same, said output wavelength-multiplexed optical signal containing therein a plurality of output optical signals with respective wavelengths that are different from each other, each of said second optical transmission lines intersecting with said plurality of first optical transmission lines at the respective nodes;

a plurality of optical processing devices (31) provided in correspondence to each node, each of said optical processing devices being supplied with a reference optical beam having a reference wavelength and selecting an optical signal having a predetermined wavelength pertinent to said device from the input wavelength-multiplexed optical signal for converting said wavelength of the selected optical signal to a second wavelength that is specified by said reference wavelength, said optical processing device further outputting the same on said second optical transmission line connected to the node; and

a reference optical beam generator (32) for producing the reference optical beam and sup-

plying the same to the optical processing devices such that the output optical signals outputted on each second optical transmission line have the wavelengths that are different from each other.

8. An optical matrix switch for switching a wavelength-multiplexed optical beam carrying thereon a number of optical signals of different wavelengths, comprising:

a plurality of first optical transmission lines (33_1 - 33_n) each supplied with an input wavelength-multiplexed optical signal and transmitting the same, said input wavelength-multiplexed optical signal containing therein a plurality of input optical signals with respective wavelengths that are different from each other;

a plurality of second optical transmission lines (37_1 - 37_n) each supplied with an intermediate wavelength-multiplexed optical signal and transmitting the same, said intermediate wavelength-multiplexed optical signal containing therein a plurality of intermediate optical signals with respective wavelengths that are different from each other, each of said second optical transmission lines intersecting with said plurality of first optical transmission lines at the respective first type nodes;

a plurality of first group optical processing devices (31) provided in correspondence to each first type node, each of said first group optical processing devices being supplied with a reference optical beam having a reference wavelength and selecting an optical signal having a predetermined wavelength pertinent to said device from the input wavelength-multiplexed optical signal for converting said wavelength of the selected optical signal to a second wavelength that is specified by said reference wavelength, each of said first group optical processing devices further outputting the same on said second optical transmission line connected to the first type node as the optical signal forming the intermediate wavelength-multiplexed optical signal;

a plurality of second group optical processing devices (31) provided in correspondence to each second type node, each of said second group optical processing devices being supplied with a reference optical beam having a reference wavelength and selecting an optical signal having a predetermined wavelength pertinent to said device from the intermediate wavelength-multiplexed optical signal for converting said wavelength of the selected optical signal to a third wavelength that is specified by said reference wavelength, each of said second group optical processing devices further outputting the same on said third optical transmission line connected to the second type node;

a plurality of third optical transmission lines (34₁ - 34_n) each supplied with an output wavelength-multiplexed optical signal and transmitting the same, said output wavelength-multiplexed optical signal containing therein a plurality of output optical signals with respective wavelengths that are different from each other, each of said third optical transmission lines intersecting with said plurality of second optical transmission lines at the respective second type nodes; and

a reference optical beam generator (32) for producing the reference optical beam and supplying the same to the optical processing devices such that the optical signals in the intermediate wavelength-multiplexed optical signal have the wavelengths that are different from each other and such that the optical signals in the output wavelength-multiplexed optical signal have the wavelengths that are different from each other.

9. An optical channel switching system for selecting a path of an optical signal in a wavelength-multiplexed optical signal, characterized by:

a plurality of input-side optical transmission lines (53₁ - 53_m) each transmitting a wavelength-multiplexed optical signal;

optical distribution means (55₁ - 55_n) connected to each of said input-side optical transmission lines for distributing the wavelength-multiplexed optical signals to a plurality of output ports;

a plurality of optical processing devices (51₁₁ - 51_{mn}) connected to the corresponding output ports of the optical distribution means for receiving the wavelength-multiplexed optical signal therefrom, each of said optical processing devices being supplied with a reference optical beam having a reference wavelength and selecting an optical signal having a predetermined wavelength from said wavelength-multiplexed optical signal, said optical processing device further converting the wavelength of the selected optical signal from said predetermined wavelength to another wavelength specified by the reference wavelength, said optical processing device thereby producing an output optical signal;

reference optical beam generation means (52) for producing the reference optical beam and supplying the same to the plurality of optical processing devices such that the output optical signals of the optical processing devices have mutually different wavelengths; and

optical multiplexing (56₁ - 56_m) means supplied with the output optical signal from each of the optical processing devices for merging the optical signals to form an output wavelength-multiplexed optical signal.

10. An optical information transmission system, charac-

terized by:

electro-optic conversion means (64) supplied with a plurality of electric signals for converting the same to optical signals having respective wavelengths that are different from each other;

optical multiplexing means (65) supplied with said plurality of optical signals for merging the same to form a wavelength-multiplexed optical signal that contains therein input optical signals corresponding to the optical signals of the electro-optic conversion means with respective wavelengths that are different from each other;

an optical matrix switch (61) comprising: a plurality of first optical transmission lines each supplied with the wavelength-multiplexed optical signal from the optical multiplexing means as an input wavelength-multiplexed optical signal and transmitting the same; a plurality of second optical transmission lines each supplied with an intermediate wavelength-multiplexed optical signal and transmitting the same, said intermediate wavelength-multiplexed optical signal containing therein a plurality of intermediate optical signals with respective wavelengths that are different from each other, each of said second optical transmission lines intersecting with said plurality of first optical transmission lines at the respective first type nodes; a plurality of first group optical processing devices provided in correspondence to each first type node, each of said first group optical processing devices being supplied with a reference optical beam having a reference wavelength and selecting an optical signal having a predetermined wavelength pertinent to said device from the input wavelength-multiplexed optical signal for converting said wavelength of the selected optical signal to a second wavelength that is specified by said reference wavelength, each of said first group optical processing devices further outputting the same on said second optical transmission line connected to the first type node as the optical signal forming the intermediate wavelength-multiplexed optical signal; a plurality of second group optical processing devices provided in correspondence to each second type node, each of said second group optical processing devices being supplied with a reference optical beam having a reference wavelength and selecting an optical signal having a predetermined wavelength pertinent to said device from the intermediate wavelength-multiplexed optical signal for converting said wavelength of the selected optical signal to a third wavelength that is specified by said reference wavelength, each of said second group optical processing devices further outputting the same on said third optical transmission line connected to the second type node; a plurality of third optical

transmission lines each supplied with an output wavelength-multiplexed optical signal and transmitting the same, said output wavelength-multiplexed optical signal containing therein a plurality of output optical signals with respective wavelengths that are different from each other, each of said third optical transmission lines intersecting with said plurality of second optical transmission lines at the respective second type nodes; and a reference optical beam generator for producing the reference optical beam and supplying the same to the optical processing devices such that the optical signals in the intermediate wavelength-multiplexed optical signal have the wavelengths that are different from each other and such that the optical signals in the output wavelength-multiplexed optical signal have the wavelengths that are different from each other;

optical distribution means (66) connected to each of the third optical transmission lines for receiving the output wavelength-multiplexed optical signal therefrom and distributing the same to a plurality of output ports;

a plurality of filtering devices (67) each connected to the output port of the optical distribution means for separating an optical signal that has a predetermined wavelength from the wavelength-multiplexed optical signal outputted at the output port, said predetermined wavelength being determined for each filtering device; and

a plurality of photodetection devices (68) provided in correspondence to said plurality of filtering devices for detecting the optical signal selected by the filtering device and producing an electric signal in response to the detection.

FIG. 1 PRIOR ART

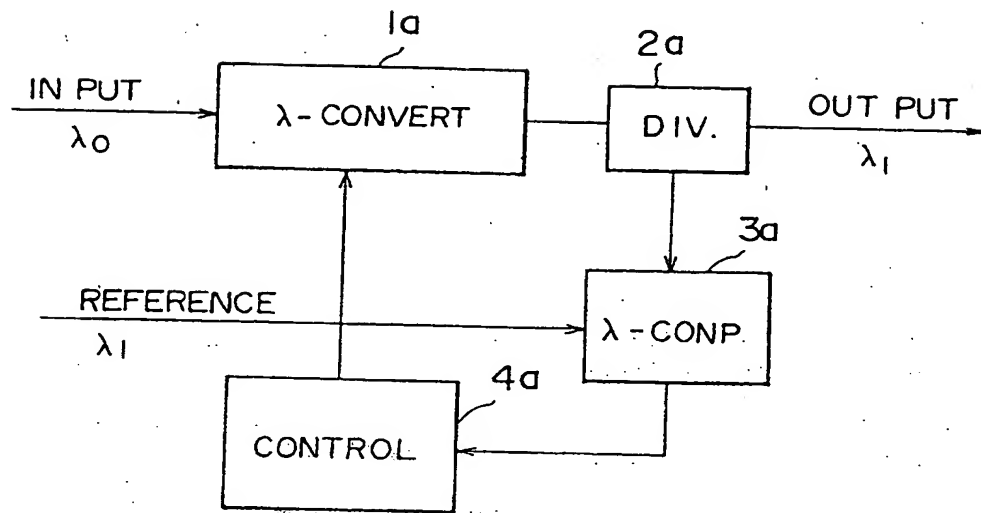


FIG. 2 PRIOR ART

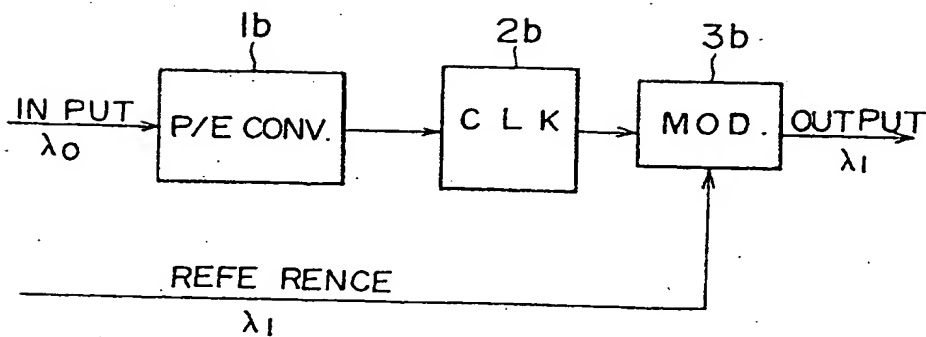


FIG. 3

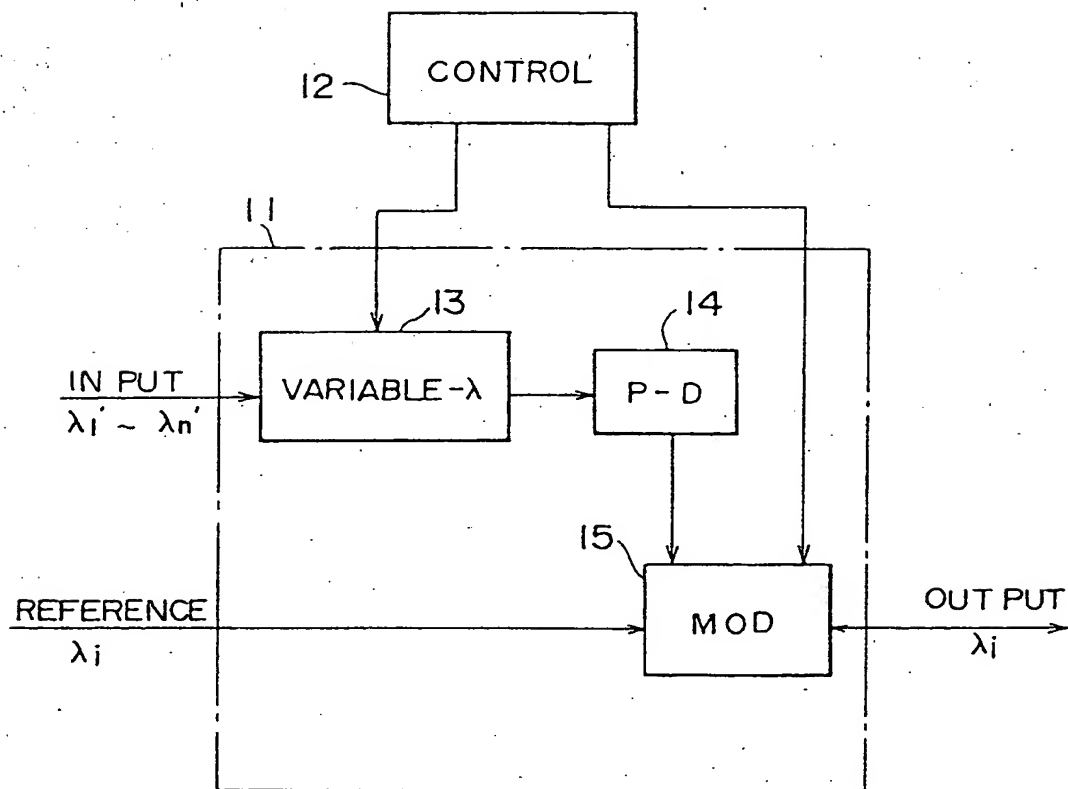


FIG. 4

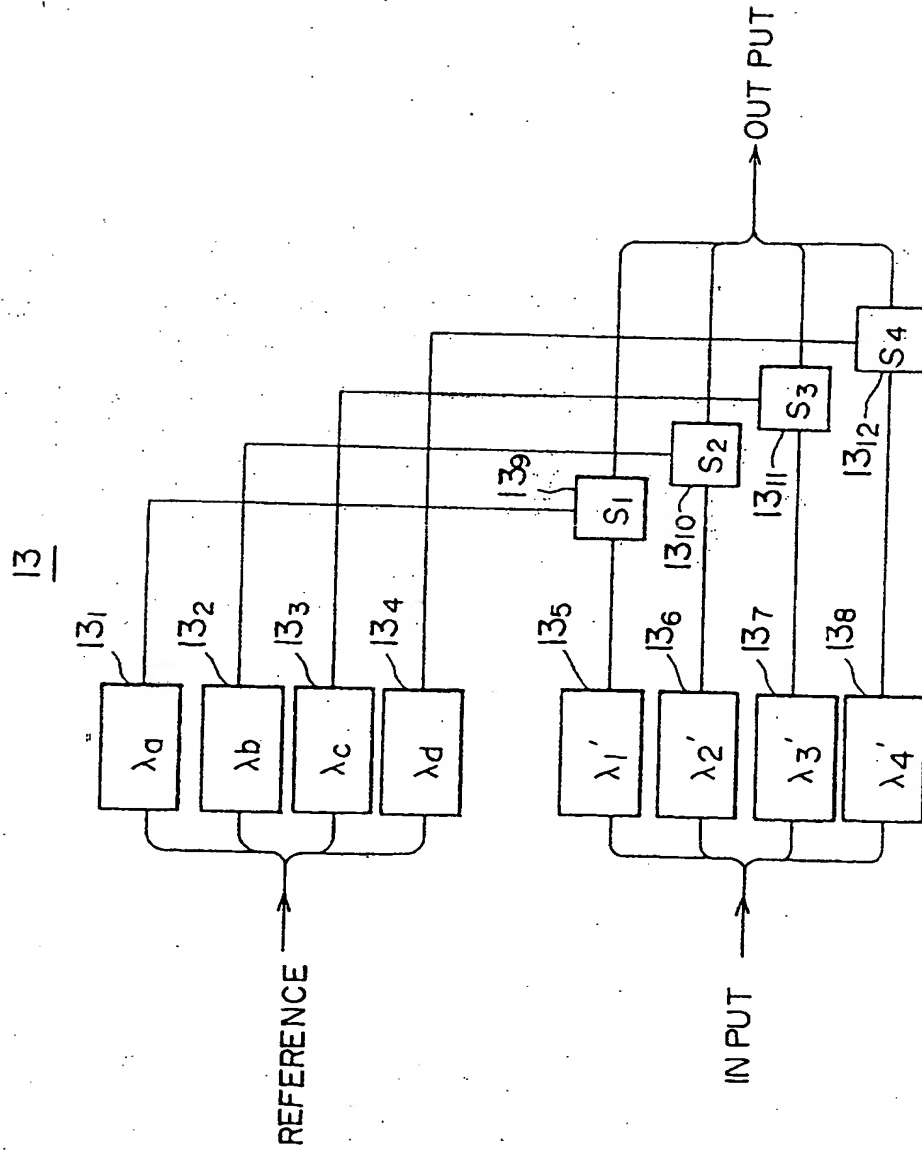


FIG. 5

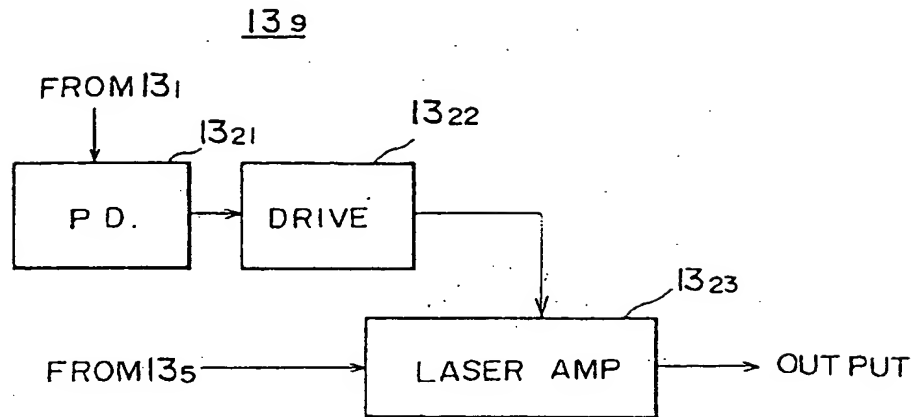


FIG. 6

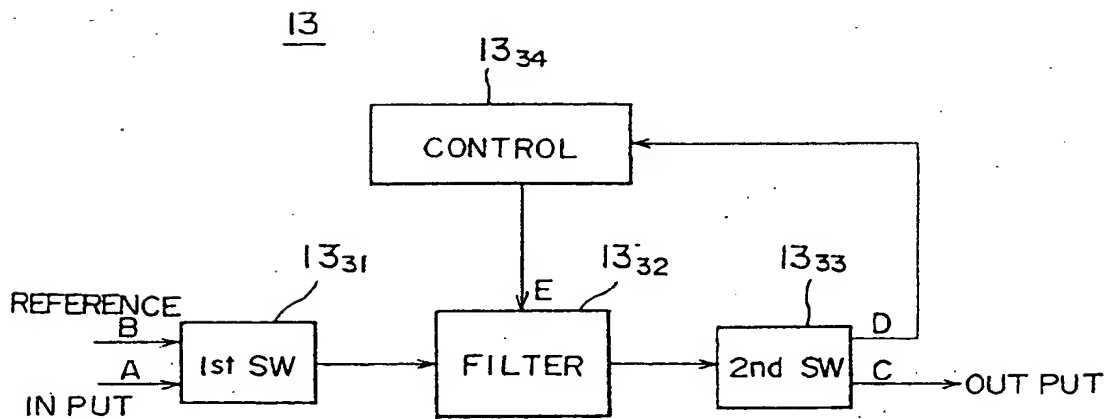


FIG. 7

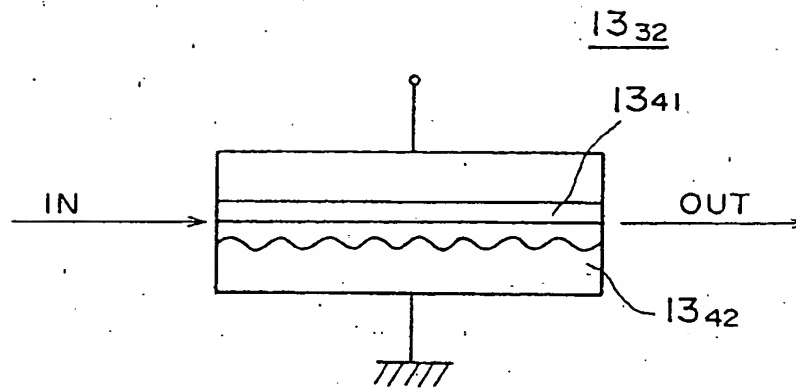


FIG. 8

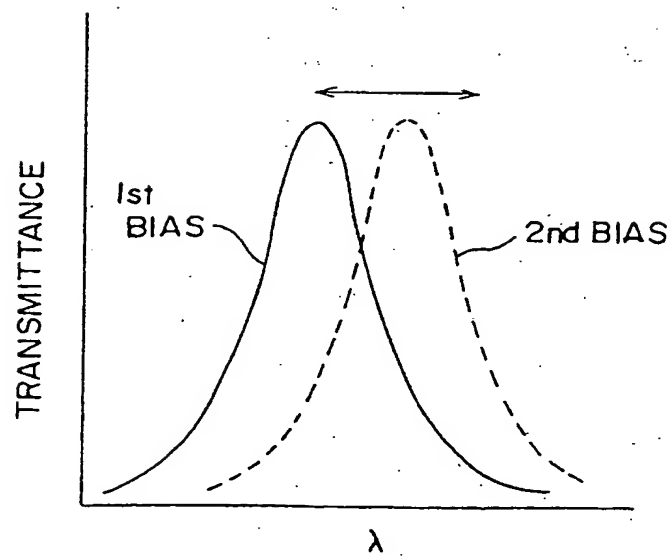


FIG. 9

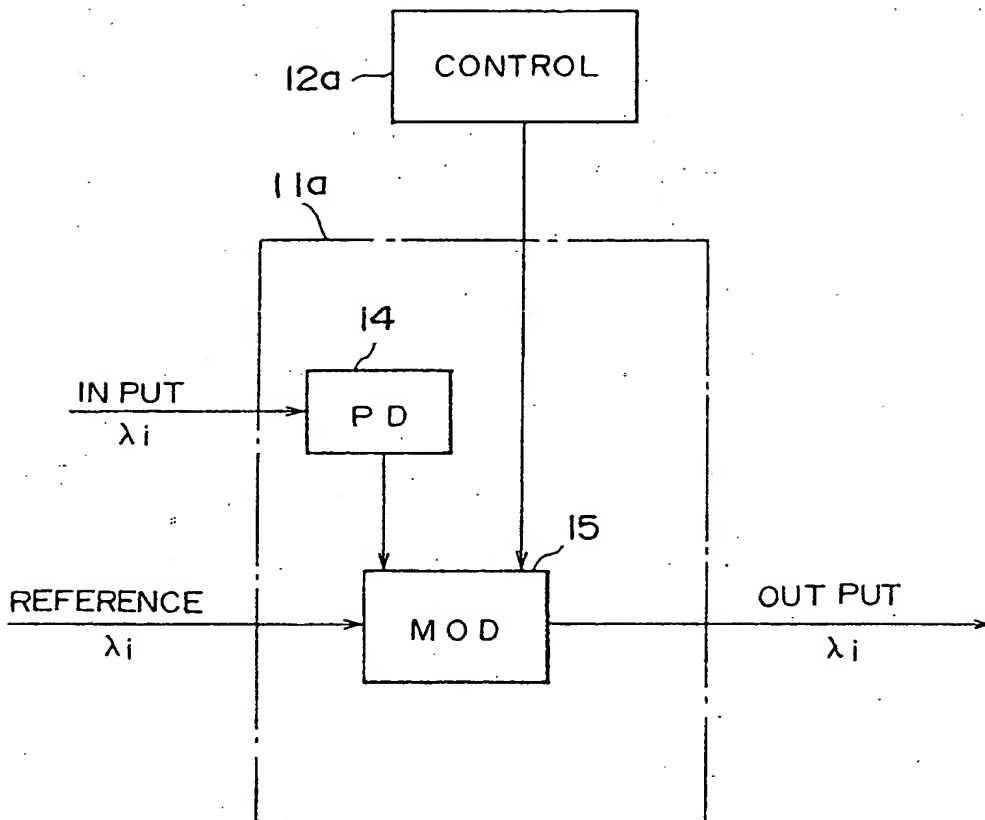


FIG. 10

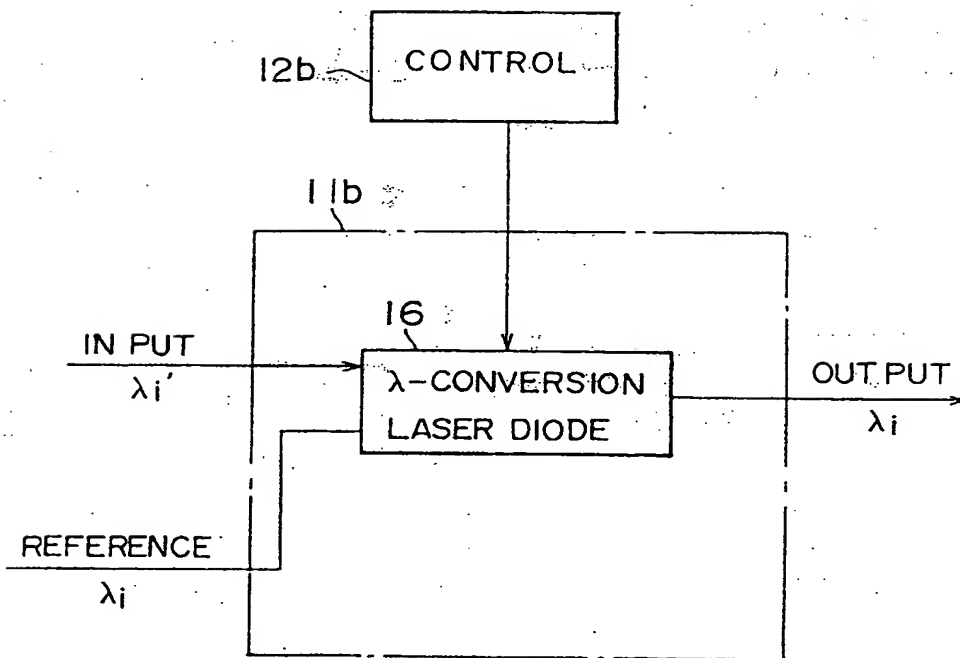


FIG. 11

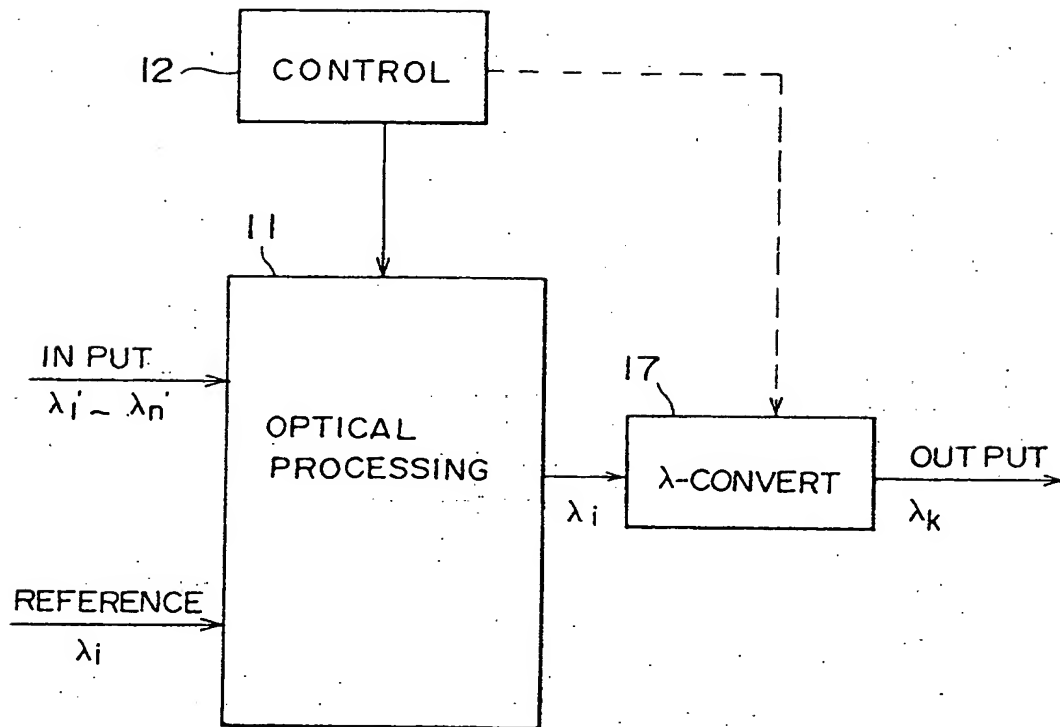


FIG. 12

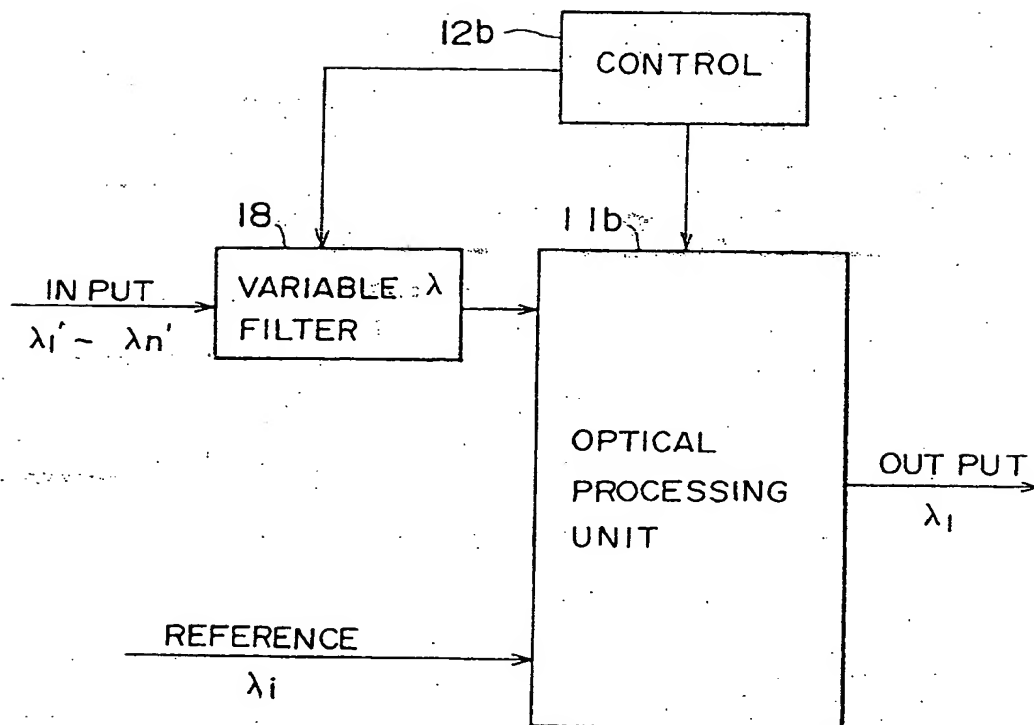


FIG. 13

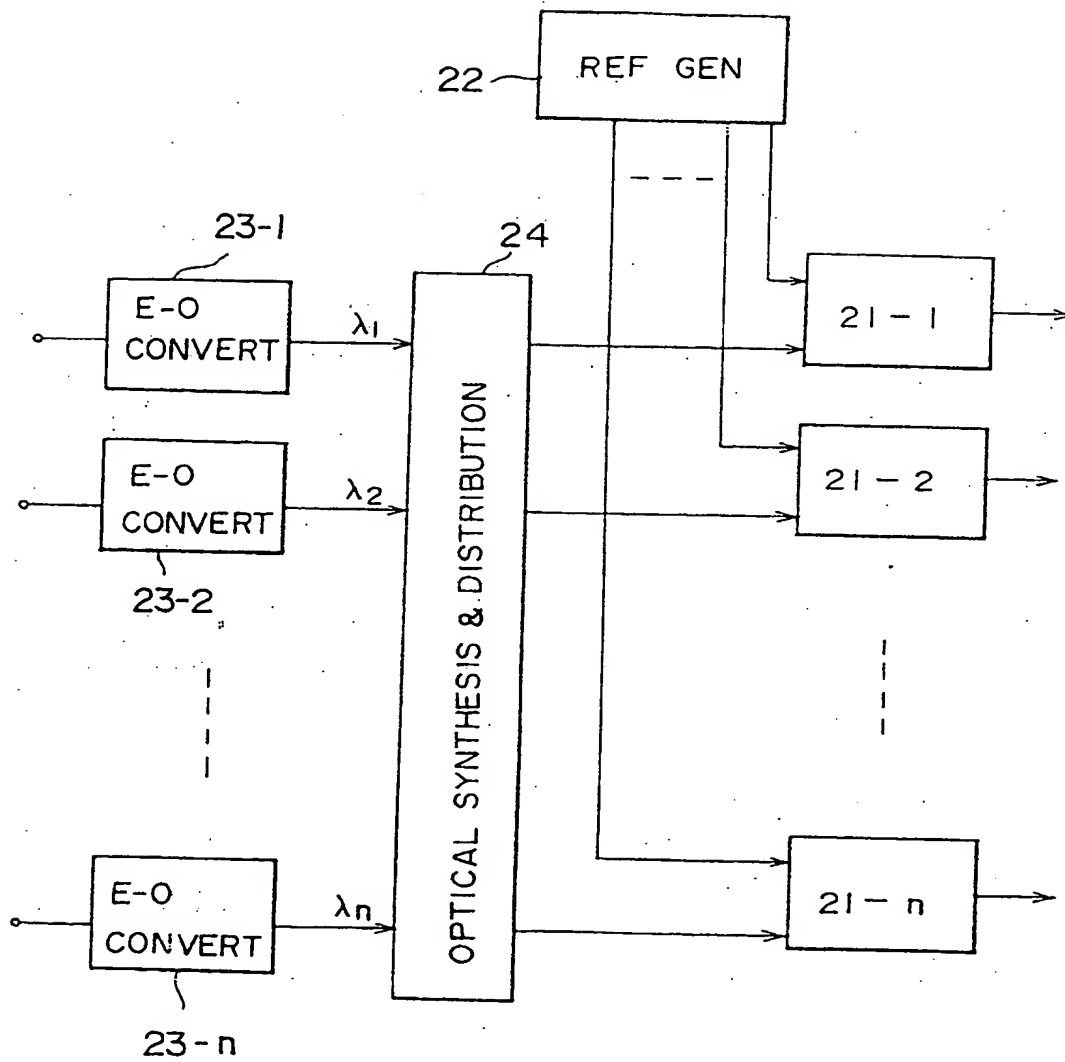


FIG. 14

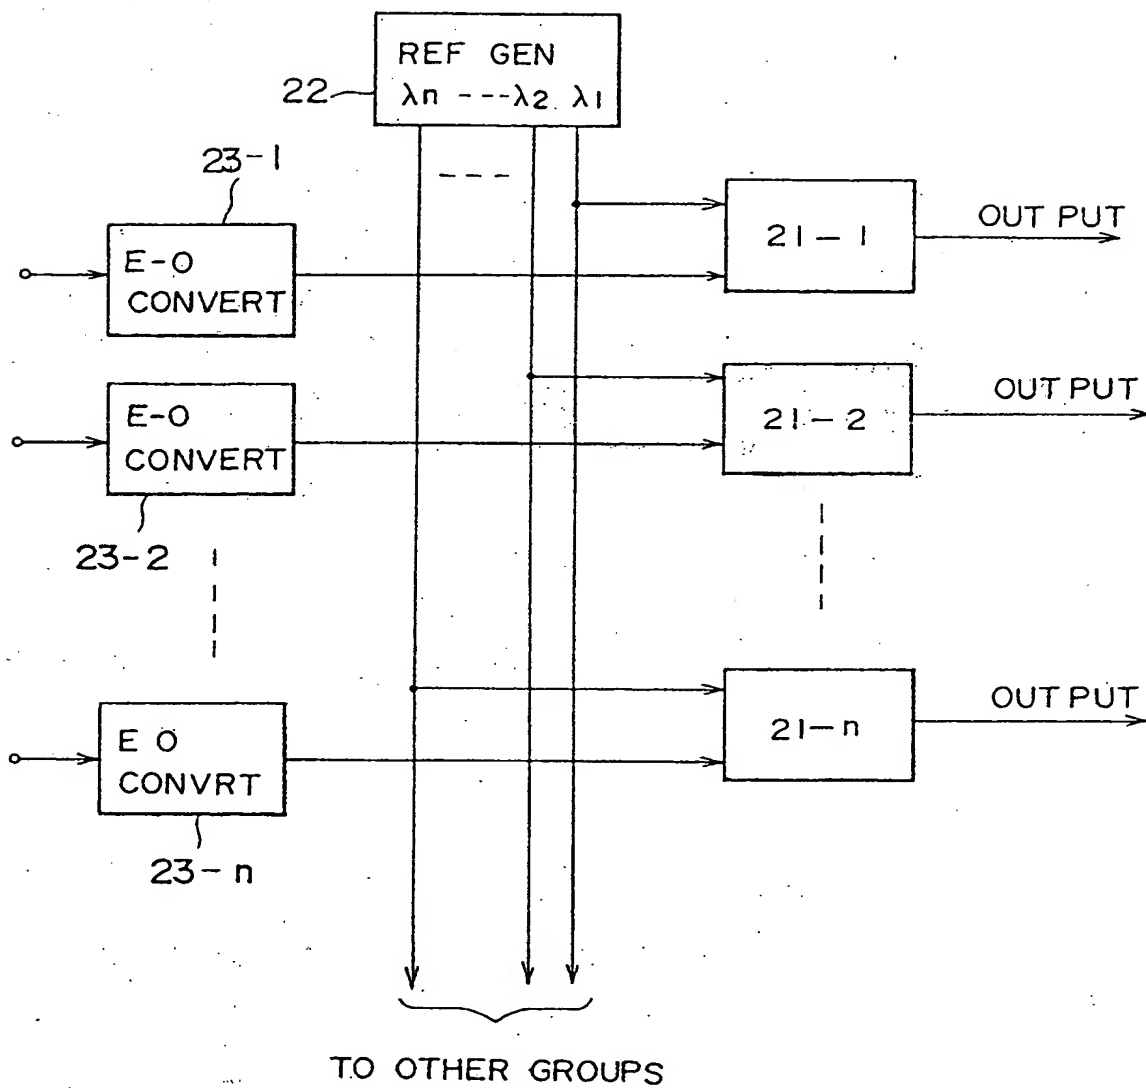


FIG. 15

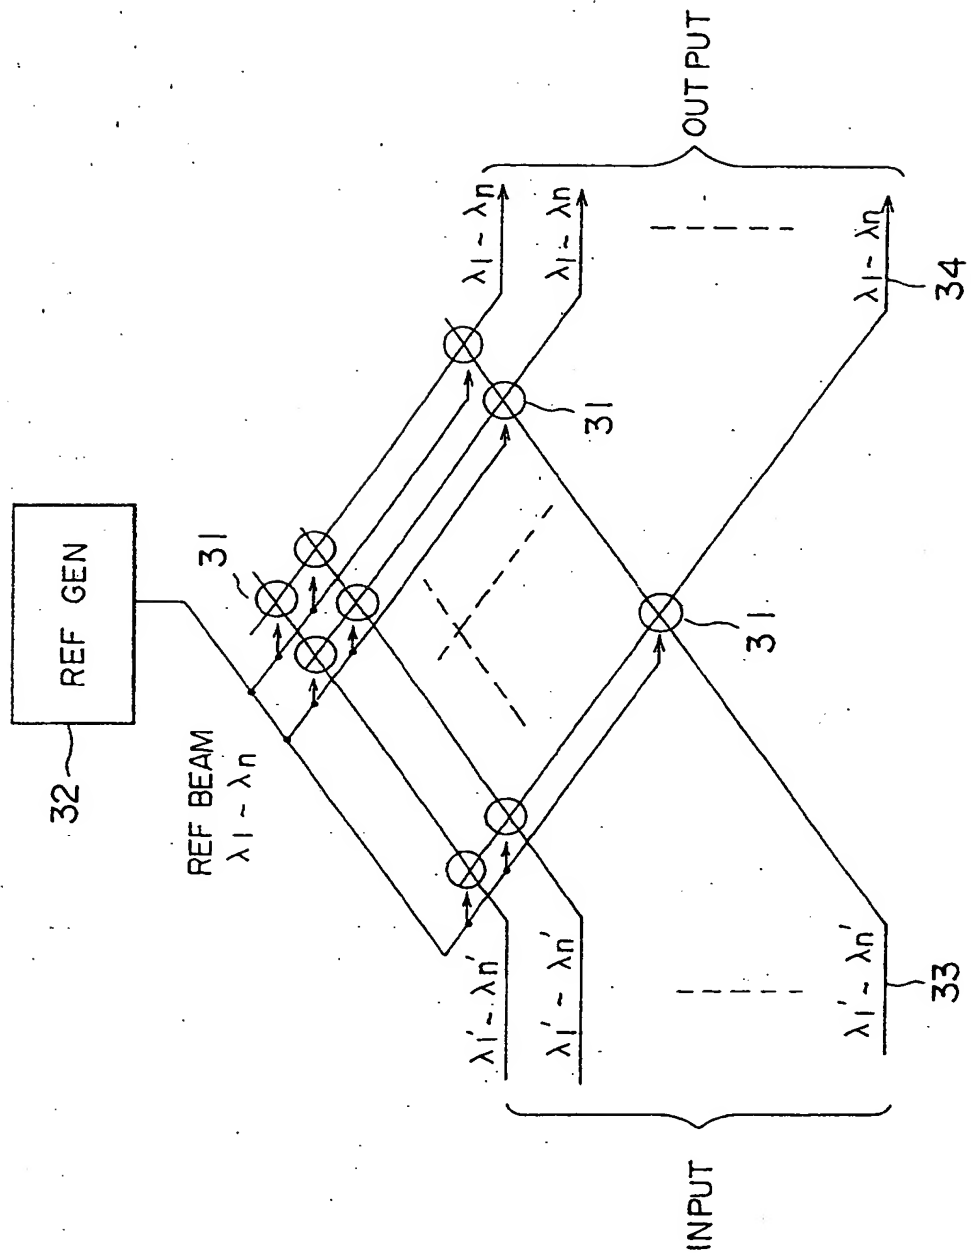


FIG. 16

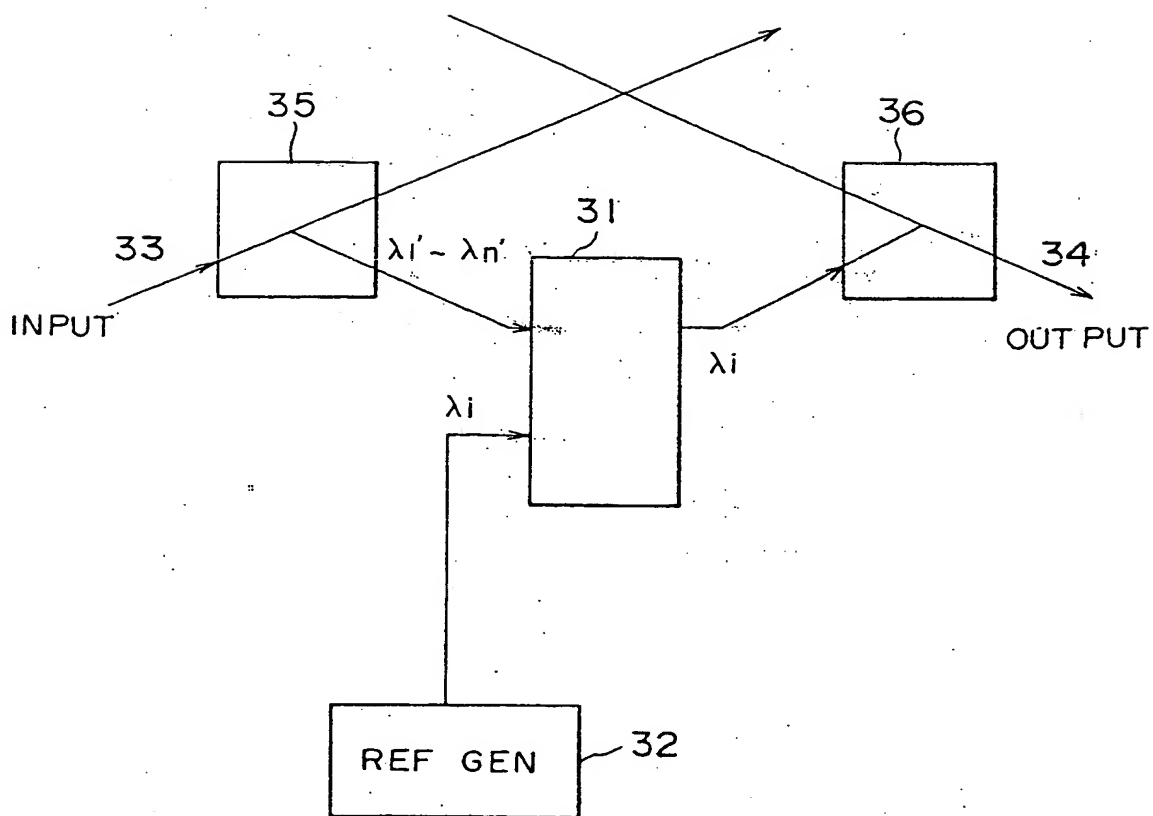


FIG. 17

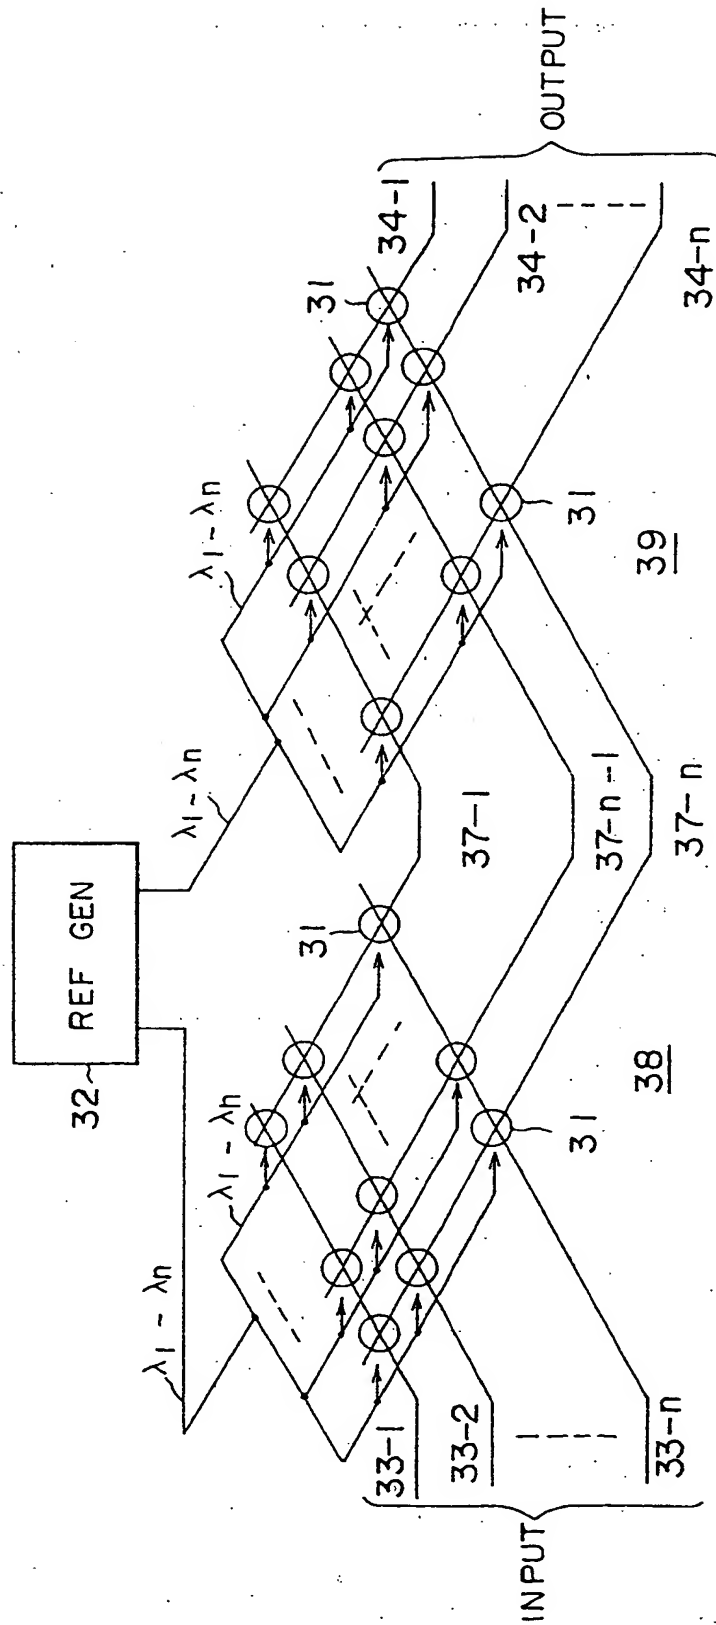


FIG. 18

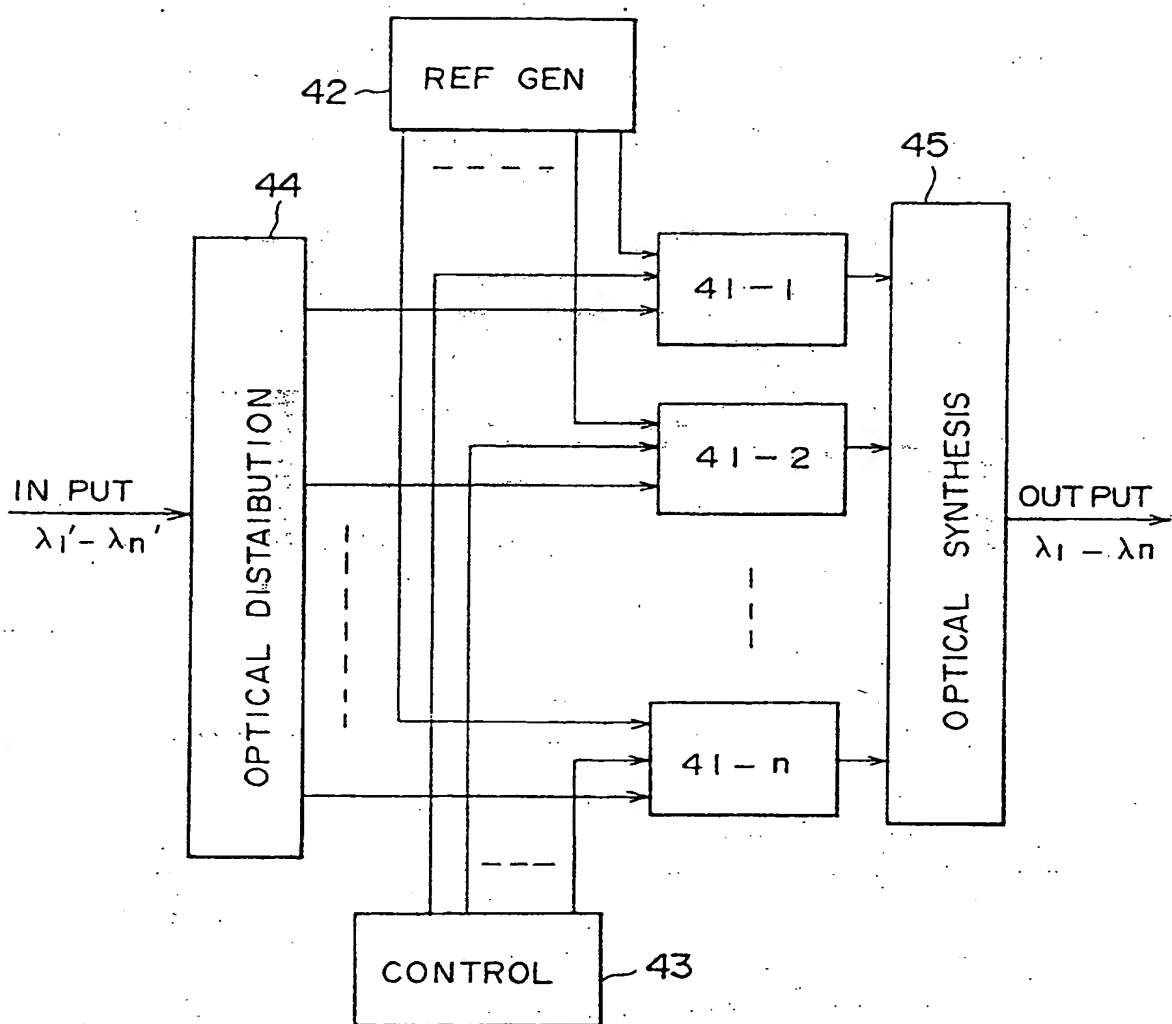


FIG. 19

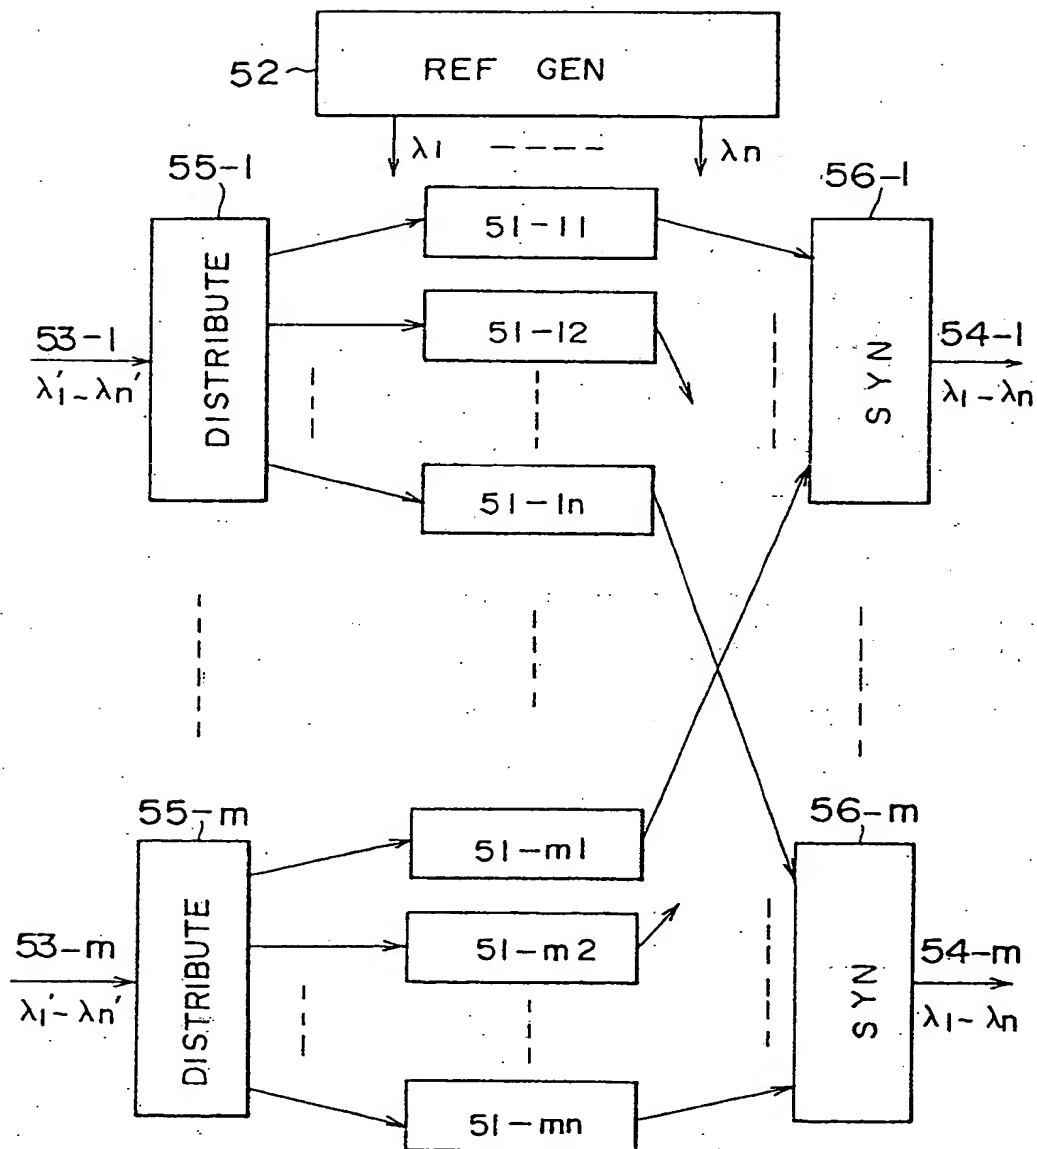


FIG. 20


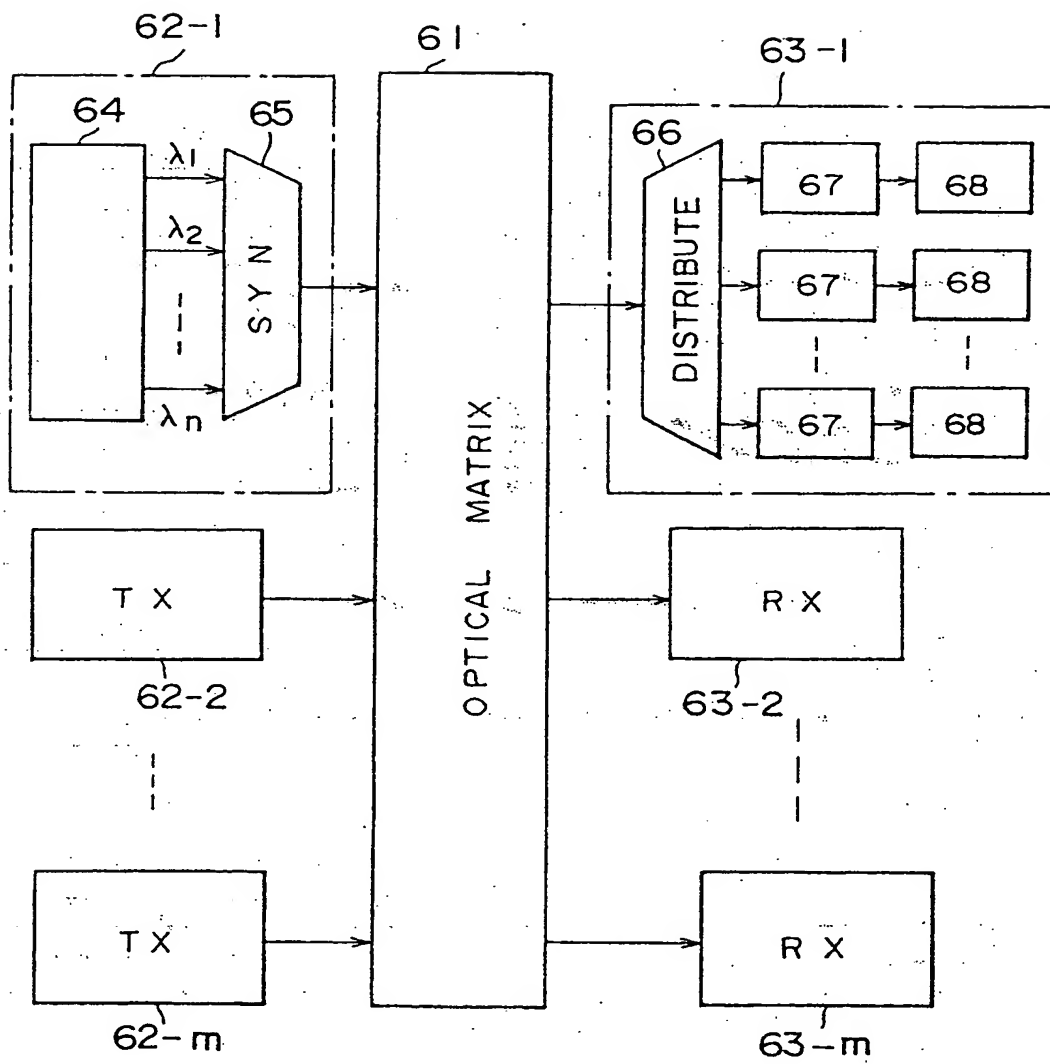


FIG. 21



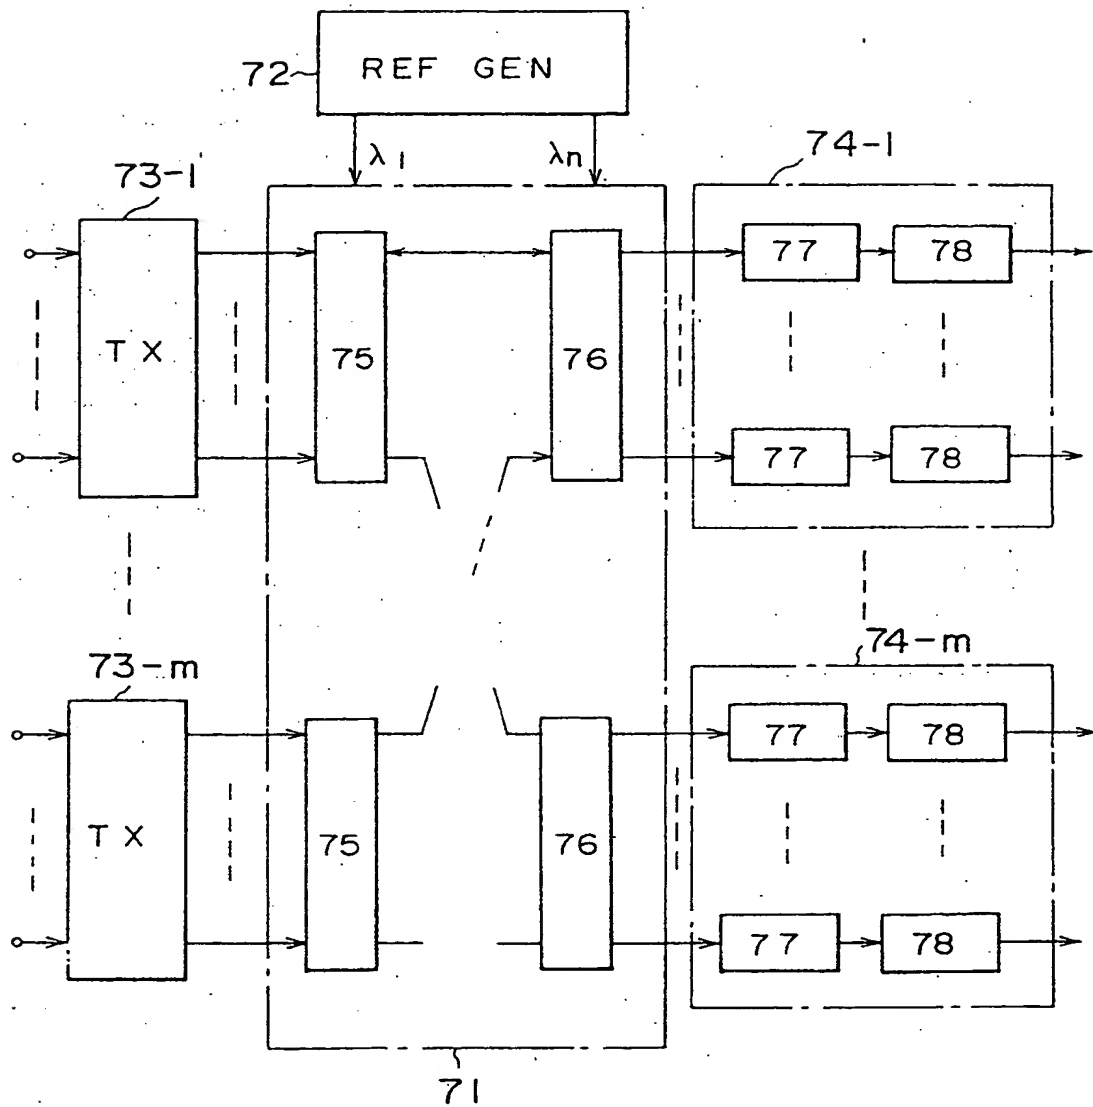

11 Publication number : 0 494 831 A3

12 EUROPEAN PATENT APPLICATION

21 Application number : 92400071.4

51 Int. Cl.⁵ : H04Q 11/00

22 Date of filing : 10.01.92

30 Priority : 10.01.91 JP 12373/91
08.02.91 JP 37850/91

43 Date of publication of application :
15.07.92 Bulletin 92/29

84 Designated Contracting States :
DE FR GB SE

88 Date of deferred publication of search report :
27.10.93 Bulletin 93/43

71 Applicant : FUJITSU LIMITED
1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi Kanagawa 211 (JP)

72 Inventor : Tanaka, Kazuhiro, c/o Fujitsu
Limited
1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)

Inventor : Wakao, Kiyohide, c/o Fujitsu Limited
1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)

Inventor : Nobuhara, Hiroyuki, c/o Fujitsu
Limited

1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)

Inventor : Fujimoto, Nobuhiro, c/o Fujitsu
Limited

1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)

Inventor : Rokugawa, Hiroyuki, c/o Fujitsu
Limited

1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)

Inventor : Kuroyanagi, Satoshi, c/o Fujitsu
Limited


1015, Kamikodanaka, Nakahara-ku
Kawasaki-shi, Kanagawa 211 (JP)

74 Representative : Joly, Jean-Jacques et al
Cabinet Beau de Loménie 158, rue de
l'Université
F-75340 Paris Cédex 07 (FR)

54 Optical processing device with wavelength stabilization and optical switch using such a device.

57 An optical processing device for converting a wavelength of an optical signal comprises an optical processing unit (11) supplied with an input optical beam carrying thereon one or more optical signals with respective wavelengths that are different from each other, the optical processing unit being further supplied with a control optical beam having a stabilized reference wavelength (λ_i) and selecting the optical signal that has a first wavelength and outputting the same with a second wavelength that is specified by the reference wavelength; and a control unit (12) for controlling the optical processing unit by specifying the first wavelength of the optical beam to be selected.

FIG. 3

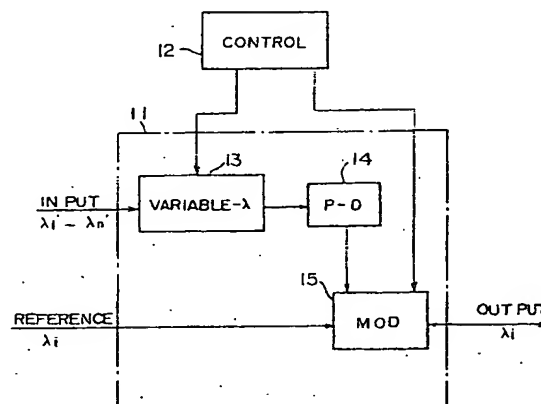



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 92 40 0071

Page 1

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.5)
X	CONFERENCE RECORD, IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, 11-14 JUNE 1989, VOL.2 PAGES 722-727, BOSTON US, XP75238 S. SUZUKI ET AL 'A Photonic Wavelength-Division Switching System Using Tunable Laser Diode Filters'	1-4	H04Q11/00
Y	* page 725, right column, line 21 - line 33; figure 8 *	10	
X	* page 723, left column, line 1 - line 35; figure 1 *	5,6	
A	* page 724, right column, line 24 - page 725, left column, line 23; figure 7 *	8-10	
X	EP-A-0 223 258 (NEC CORP.)	7	
A	* abstract; figure 1 *	1-10	
X	CONFERENCE RECORD, IEEE/IEICE GLOBAL TELECOMMUNICATIONS CONFERENCE 1987, 15-18 NOV. 1987, VOL.1 PAGES 678-683, TOKYO JP D.W. SMITH ET AL 'Optical Processing in Future Coherent Networks'	1-4	
	* abstract *		
	* page 681, right column, line 35 - page 682, left column, line 22; figure 5 *		

	-/--		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. CL.5)
			H04Q
Place of search	Date of completion of the search	Examiner	
THE HAGUE	30 AUGUST 1993	D.J. O'REILLY	
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone		T : theory or principle underlying the invention	
Y : particularly relevant if combined with another document of the same category		E : earlier patent document, but published on, or after the filing date	
A : technological background		D : document cited in the application	
O : non-written disclosure		L : document cited for other reasons	
P : intermediate document		& : member of the same patent family, corresponding document	



European Patent
Office

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet -B-

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees has been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 92 40 0071

Page 2

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.5)
X	IEEE JOURNAL OF QUANTUM ELECTRONICS vol. 24, no. 11, November 1988, NEW YORK, US pages 2153 - 2159 H. KAWAGUCHI ET AL 'Tunable Optical-Wavelength Conversion Using an Optically Triggerable Multielectrode Distributed Feedback Laser Diode' * abstract * * page 2153, right column, line 5 - page 2154, left column, line 2 * * page 2156, right column, line 11 - page 2157, left column, line 51; figures 1,2,8,9 *	1-4	<p>TECHNICAL FIELDS SEARCHED (Int. CL.5)</p>
X	IEEE PHOTONICS TECHNOLOGY LETTERS vol. 1, no. 6, June 1989, NEW YORK, US K. ODA ET AL 'Channel Selection and Stabilization Technique for a Waveguide-Type 16-Channel Frequency Selection Switch for Optical FDM Distribution Systems' * the whole document *	1-3	
X	ELECTRONICS LETTERS vol. 22, no. 20, 25 September 1986, STEVENAGE GB pages 1084 - 1085 A.R. CHRAPLYVY ET AL 'Narrowband Tunable Optical Filter for Channel Selection in Densely Packed WDM Systems.' * the whole document *	1-3	
<p>The present search report has been drawn up for all claims</p>			
Place of search THE HAGUE		Date of completion of the search 30 AUGUST 1993	Examiner D.J. O'REILLY
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p>		<p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>	



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 92 40 0071

Page 3

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A	PROCEEDINGS OF THE FOURTH TIRRENIA INTERNATIONAL WORKSHOP ON DIGITAL COMMUNICATIONS, 19-23 SEPTEMBER 1989, PAGES 349-364, TIRRENIA IT, XP164007 M. FUJIWARA ET AL 'Photonic Switching Systems using Coherent Optical Transmission Technology' * page 355, line 2 - line 8; figure 8 * * page 358, line 22 - line 35; figure 14 * ---	1	
X	PATENT ABSTRACTS OF JAPAN vol. 13, no. 463 (E-833)(3811) 19 October 1989 & JP-A-11 81 294 (FUJITSU) 19 July 1989 * abstract *	8	
Y	---	10	
X	PATENT ABSTRACTS OF JAPAN vol. 11, no. 240 (E-529)(2687) 6 August 1987 & JP-A-62 51 895 (NEC CORP.) 6 March 1987 * abstract *	9	
A	PATENT ABSTRACTS OF JAPAN vol. 8, no. 39 (E-228)(1476) 21 February 1984 & JP-A-58 196 796 (NIPPON DENKI K.K.) 16 November 1983 * abstract *	8	
A	IEEE NETWORK: THE MAGAZINE OF COMPUTER COMMUNICATIONS vol. 3, no. 2, March 1989, NEW YORK US pages 13 - 20, XP26492 R.A. LINKE 'Frequency Division Multiplexed Optical Networks Using Heterodyne Detection' * page 17, right column, line 3 - line 28; figure 7 * ---	1-4	TECHNICAL FIELDS SEARCHED (Int. Cl.5)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 30 AUGUST 1993	Examiner D.J. O'REILLY
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 92 40 0071

Page 4

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A	<p>IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATION vol. 6, no. 7, August 1988, NEW YORK US pages 1209 - 1226, XP68606 H. SCOTT HINTON 'Architectural Considerations for Photonic Switching Networks' * page 1216, left column, line 11 - right column, line 20 * * page 1218, right column, line 7 - page 1219, left column, line 11; figures 10-12,14,15 * * page 1212, left column, line 53 - right column, line 13; figure 6 *</p>	1,5-10	
A	<p>EP-A-0 249 112 (POLAROID CORP.) * abstract * * column 6, line 23 - column 9, line 9; figure 5 *</p>	1-10	
A	<p>JOURNAL OF LIGHTWAVE TECHNOLOGY vol. 8, no. 3, March 1990, NEW YORK US pages 416 - 422, XP136396 M. FUJIWARA ET AL 'A Coherent Photonic Wavelength-Division Switching System for Broad-Band Networks' * page 416, right column, line 43 - page 417, left column, line 4; figure 1 *</p>	1-4	
<p>-----</p>			
<p>The present search report has been drawn up for all claims</p>			
Place of search		Date of completion of the search	Examiner
THE HAGUE		30 AUGUST 1993	D.J. O'REILLY
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>I : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons * : member of the same patent family, corresponding document</p>			



European Patent
Office

EP 92 40 0071 -B-

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims 1-4 : Optical wavelength converter.
2. Claims 5,6 : Optical path selector.
3. Claims 7,8 : Optical crossbar switch.
4. Claim 9 : Multi-stage optical switch.
5. Claim 10 : Information transmission system.